

Installation Instruction

⚠ WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

⚠ WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

⚠ CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.


NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90° supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location

General Wiring Diagram

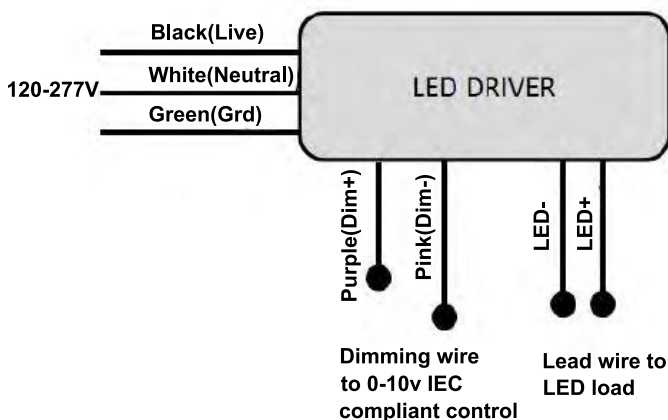

Note: The CCT-adjustable function integrated Driver will have one more "LED-" output wire.

Installation Instruction

Surface Mounting(A)

Figure 1

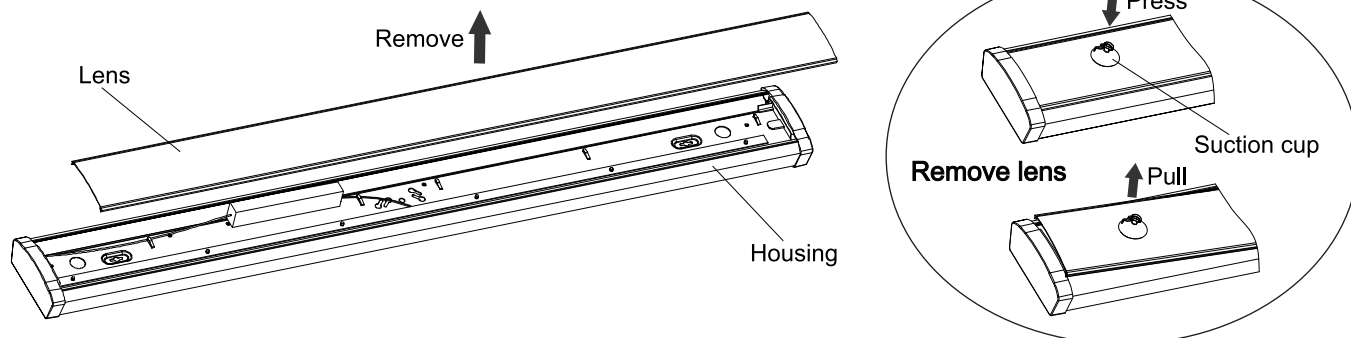


Figure 1A

Figure 2

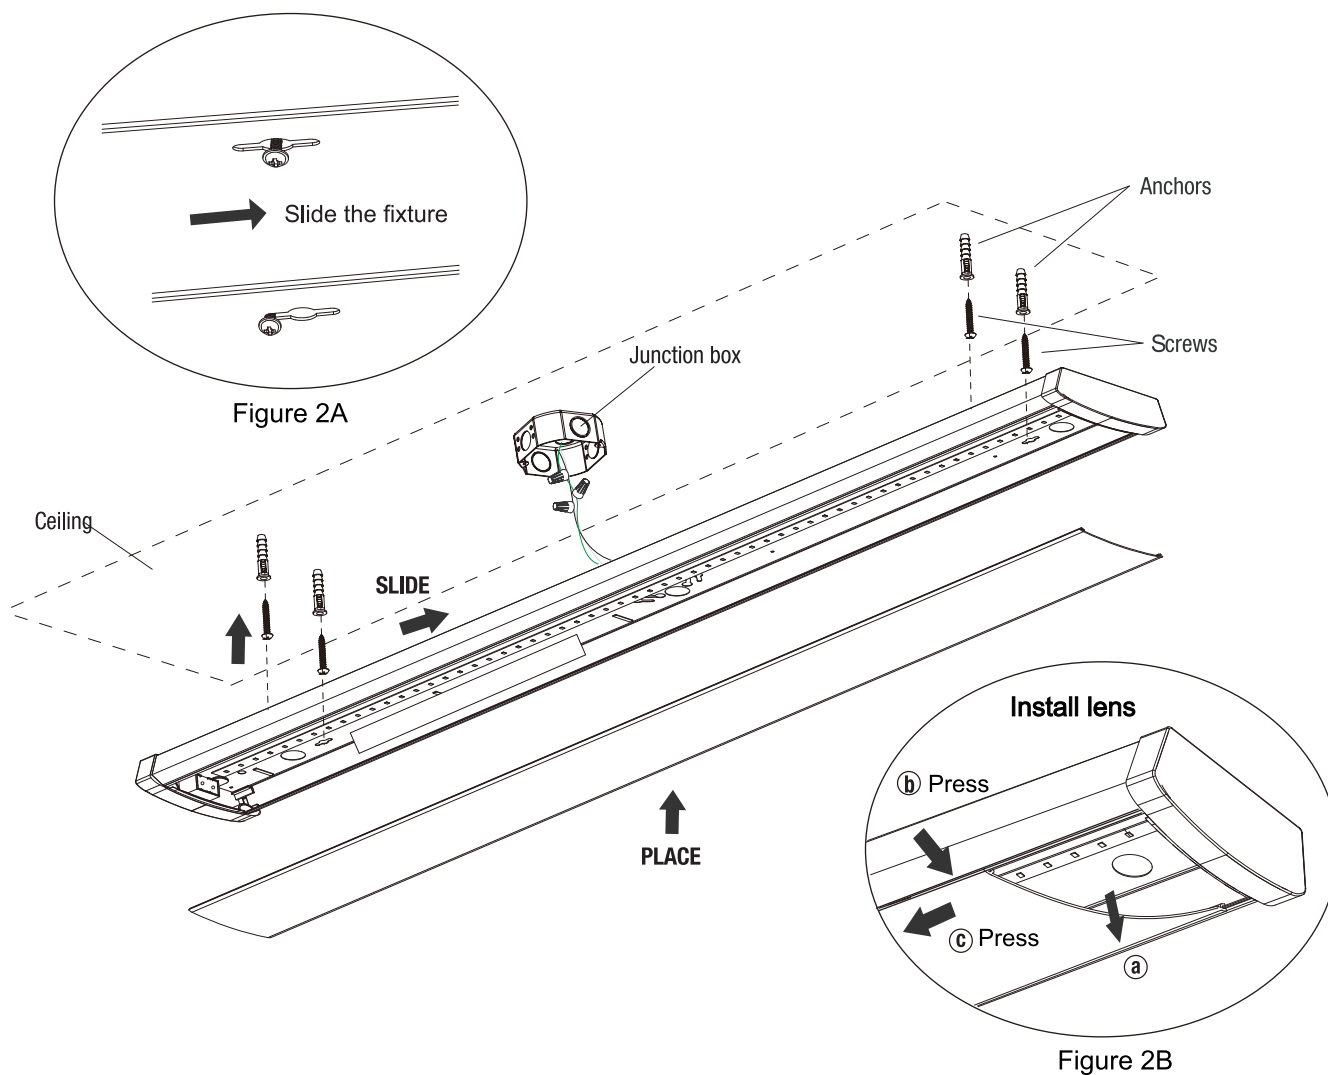


Figure 2B

Installation Instruction

Installation steps

Step 1: Remove the lens. Press the provided suction cup to absorb one side of the lens, then pull the suction cup to detach the lens from the luminaire housing(Fig.1)

Step 2: Place the luminaire on the junction box as a template, then mark the positions of 4 mounting holes in the ceiling.

Step 3: Put the luminaire aside and drill 4 mounting holes. Insert anchor into each hole. Screw in the screws one by one to three-quarters of the depth. (Fig.2)

Step 4: Connect the AC wires.

Step 5: Hang the fixture body onto the 4 screws. Slide the fixture until the screw heads snap into the intended track. Then fully tighten the screws to fix the fixture firmly. (Fig.2)

Step 6: Reattach the lens.(Fig.2)

① Insert lens slot onto one side-edge of housing.


② Carefully squeeze one end of the lens to engage opposite side-edge of the housing.

③ Continue this action down length of the lens until it fully installed onto housing.

Step 7: Turn on the luminaire.

Surface Mounting(B)

Figure 3

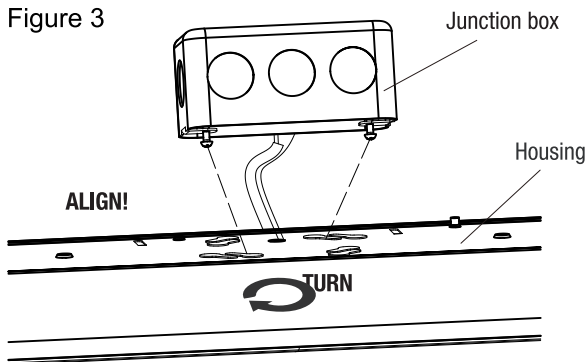

Step 1: Remove the lens from the housing by using the provided suction cup. (Fig.1A detail)

Step 2: Connect the AC wires.

Step 3: Hang the fixture to the screws on the edge of the junction box, then turn the fixture to align it to the junction box, lock the screws to make the fixture fixed firmly.(Figure 3)

Step 4: Reinstall the lens.(Fig.2B detail)

Step 5: Turn on the luminaire.