

Installation Instruction

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handing fixture.


NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90° supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for wet location.

General Wiring Diagram

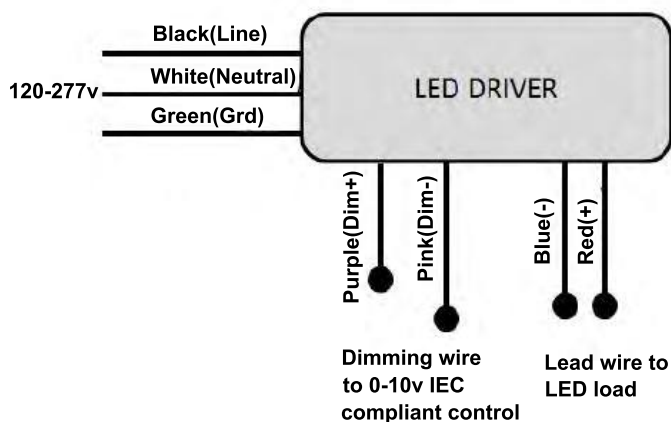


Installation Instruction

INSTRUCTIONS:

Always turn off the power supply from main circuit breaker first!


HARDWARE CONTENT

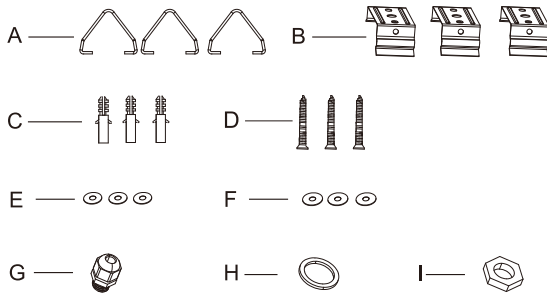


	CONTENTS	PCS
A	V-HOOK	3
B	SURFACE MOUNT BRACKET	3
C	SELF-DRILLING SCREW-4*32*7	3
D	PLASTIC TUBE-6*31mm	3
E	METAL GASKET-4*12*0.7	3
F	RUBBER GASKET-4*12*1	3
G	PLUG	1
H	SEALING RING	1
I	NUT	1

A:Surface Mounting


1. Locate and drill holes, then install clips to the ceiling surface using hardware found in hardware kit.

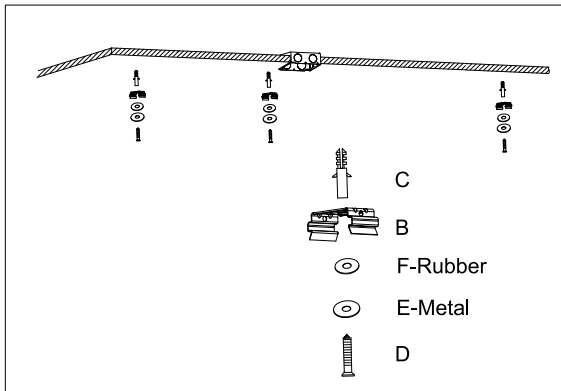


2. Press fixture housing to the clips until both sides of the housing recesses are secured.

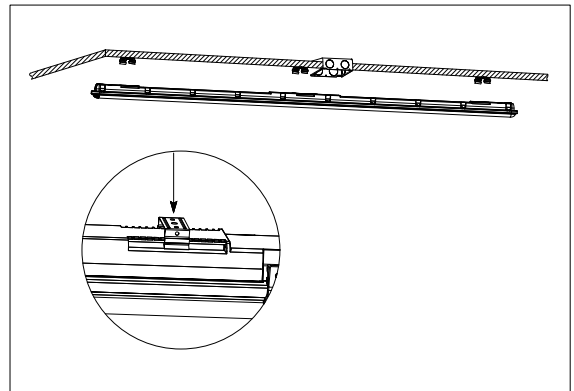

3. Release latches by pulling top of latch away from housing.

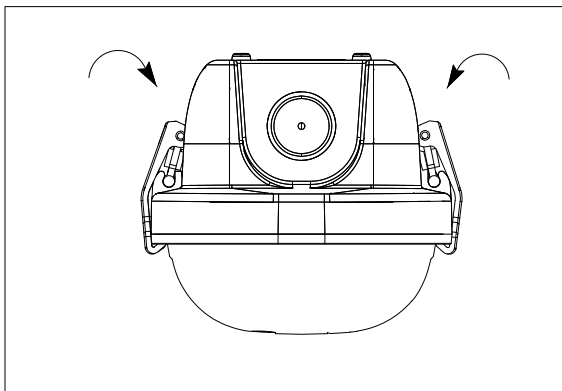


4. Detach LED tray and lens from fixture.

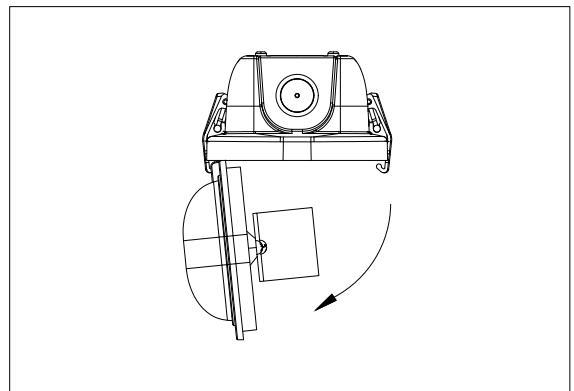


Installation Instruction


5. Connect power cord to driver as shown in the figure. (the flexible cord supplied by others)

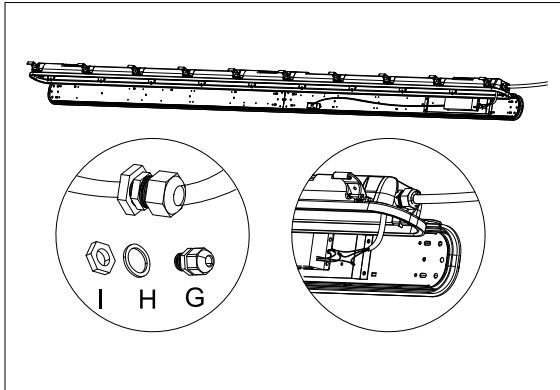

7. Reattach LED tray and lens to fixture by reversing step 4.

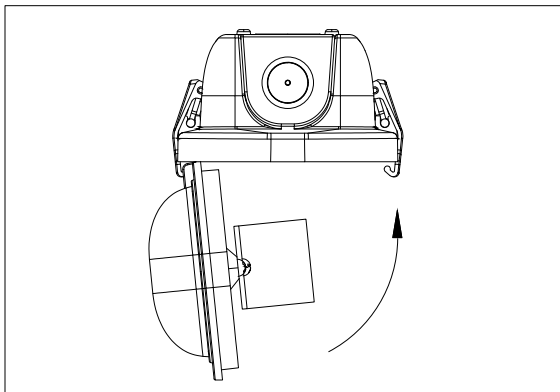

6. Connect fixture to AC power following General Wiring Diagram for reference.

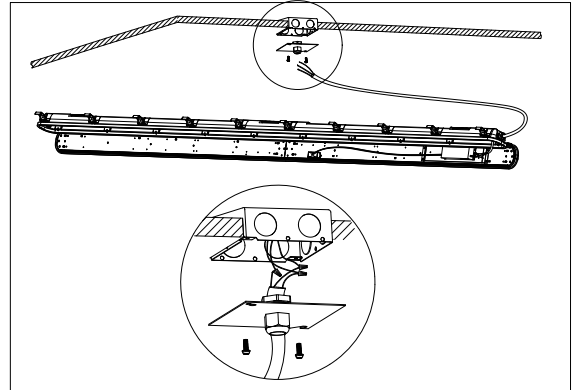

8. Secure lens to housing with lens latches.

