
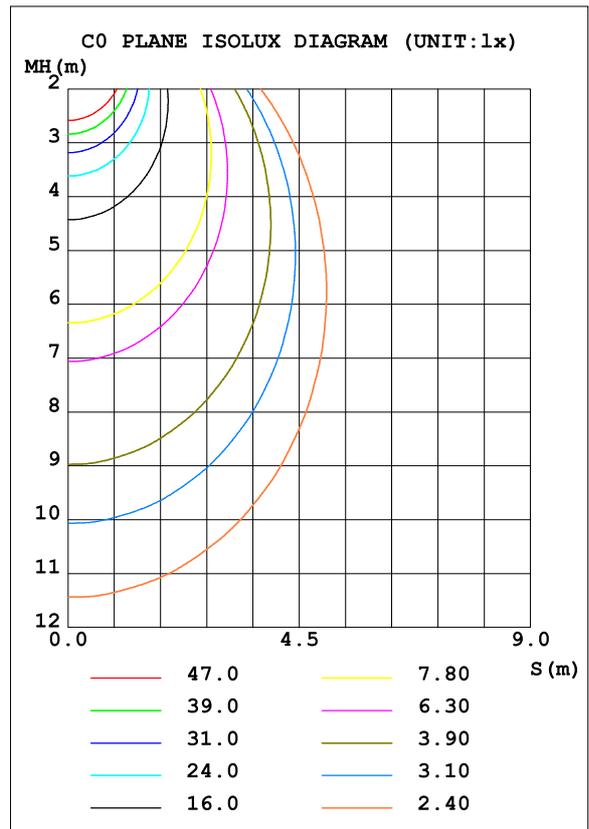


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	314.1	S/MH (C0/180)	1.14
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	740.90	η UP, DN (C0-180)	0.9, 48.4
NOMINAL FLUX (lm)	740.903	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 49.9
LAMPS INSIDE	1	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.0	η down (%)	98.3	CIBSE SHR MAX	1.30

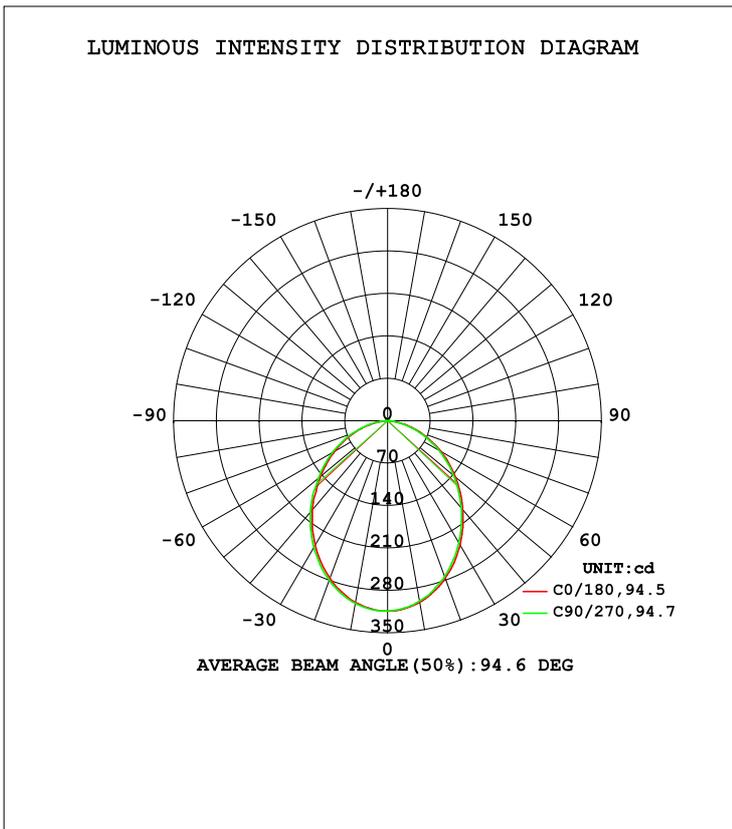

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.074m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	304.5	302.7	302.0	303.9	304.3	305.4	305.9	304.6	0- 10	29.50	29.50	3.98,3.98
20	276.4	274.1	273.6	275.7	276.6	278.6	280.0	277.9	10- 20	82.25	111.7	15.1,15.1
30	237.2	234.2	232.8	236.0	236.9	239.5	241.6	238.1	20- 30	118.7	230.4	31.1,31.1
40	191.5	188.7	187.8	190.9	191.7	194.1	196.6	193.0	30- 40	134.2	364.7	49.2,49.2
50	145.3	140.4	141.2	142.5	143.3	148.5	147.9	146.7	40- 50	129.6	494.2	66.7,66.7
60	100.5	96.43	96.88	98.48	99.30	103.4	104.1	102.1	50- 60	109.2	603.4	81.4,81.4
70	56.91	54.38	53.43	56.52	57.38	59.90	61.36	58.36	60- 70	77.44	680.9	91.9,91.9
80	18.80	17.83	17.02	19.65	19.51	22.18	23.08	20.70	70- 80	40.06	720.9	97.3,97.3
90	1.528	1.580	1.576	1.586	0.8358	0.9496	0.8163	0.8521	80- 90	7.264	728.2	98.3,98.3
100	1.665	1.707	1.705	1.716	1.124	1.081	1.097	1.100	90-100	1.404	729.6	98.5,98.5
110	1.859	1.891	1.890	1.903	1.466	1.417	1.433	1.437	100-110	1.615	731.2	98.7,98.7
120	2.052	2.090	2.089	2.103	1.837	1.782	1.803	1.814	110-120	1.790	733.0	98.9,98.9
130	2.245	2.278	2.277	2.285	2.190	2.135	2.168	2.167	120-130	1.866	734.9	99.2,99.2
140	2.456	2.500	2.507	2.507	2.535	2.474	2.507	2.516	130-140	1.824	736.7	99.4,99.4
150	2.717	2.746	2.765	2.763	2.846	2.793	2.821	2.819	140-150	1.657	738.4	99.7,99.7
160	2.977	2.993	3.009	3.018	3.098	3.049	3.088	3.069	150-160	1.344	739.7	99.8,99.8
170	3.204	3.206	3.225	3.226	3.306	3.231	3.284	3.245	160-170	0.8882	740.6	100,100
180	3.359	3.332	3.365	3.349	3.367	3.329	3.371	3.347	170-180	0.3141	740.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:

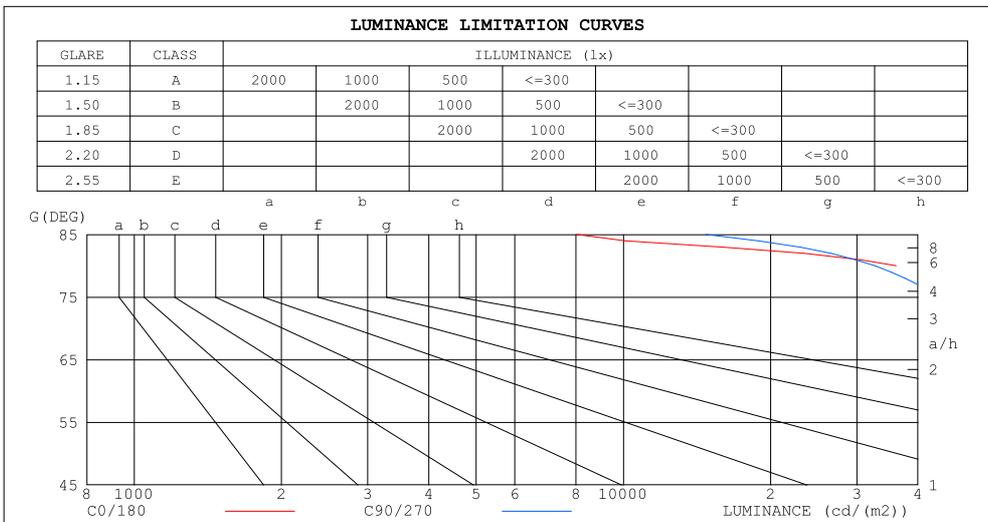

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8018	14757
80	36105	32676
75	48173	43806
70	55483	52072
65	61282	58452
60	66995	64593
55	71325	69051
50	75368	73243
45	79360	77443


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.05	1.01	.97	1.02	.99	.96	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.92	.86	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.76	.73	.71
3.0	.81	.74	.68	.80	.73	.67	.77	.71	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.73	.64	.58	.71	.63	.57	.69	.62	.56	.66	.60	.55	.64	.59	.55	.52
5.0	.65	.57	.50	.64	.56	.50	.62	.55	.49	.60	.53	.49	.58	.52	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.43	.54	.48	.43	.52	.47	.42	.40
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.38	.48	.42	.38	.36
8.0	.49	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.34	.44	.39	.34	.32
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.32	.28	.27

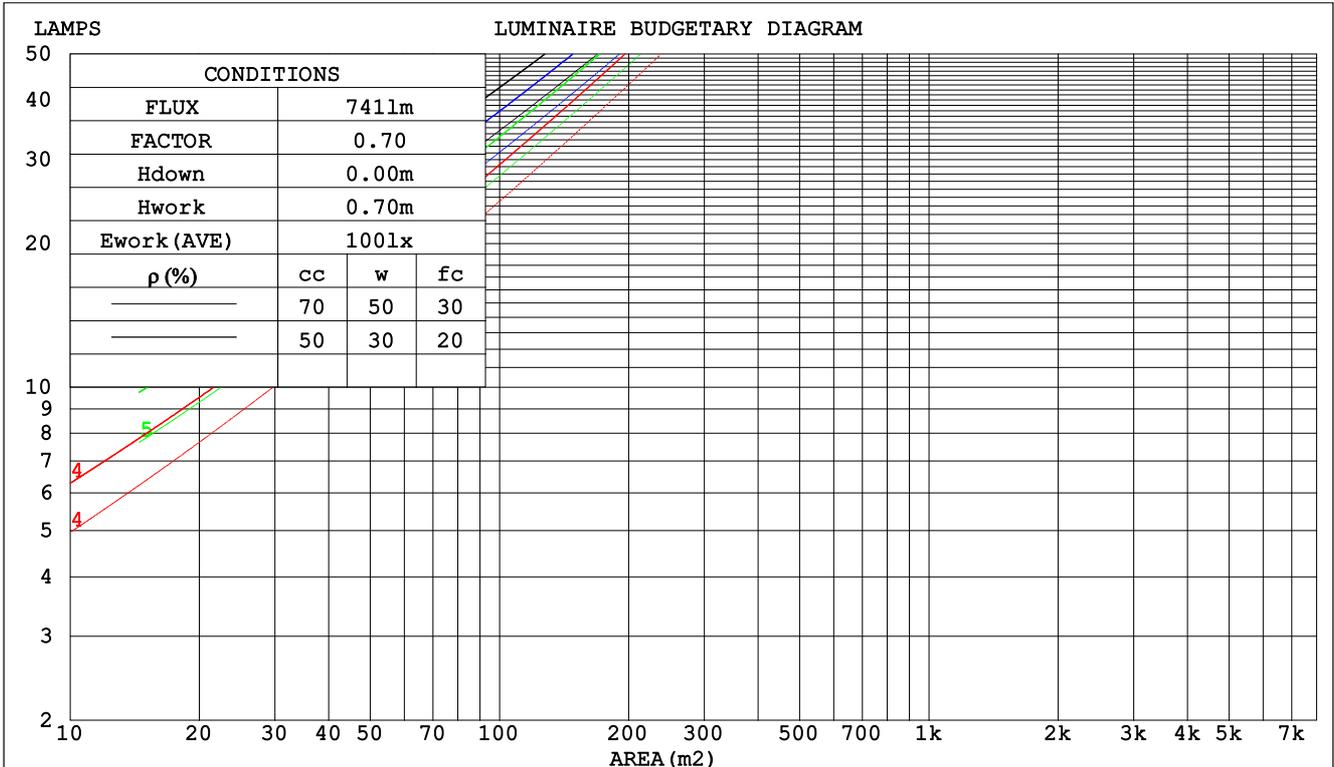

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm														
NAME: 4 inch Gimbal					TYPE:					WEIGHT:				
SPEC.:5000K					DIM.:					SERIAL No.:				
MFR.: EVERFINE					SUR.:0.065					Shielding Angle:				

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.284	.162	.051	.277	.158	.050	.263	.151	.048	.250	.144	.046	.238	.138	.044	
2.0	.272	.149	.046	.265	.146	.045	.253	.140	.044	.241	.135	.042	.231	.130	.041	
3.0	.254	.135	.040	.248	.133	.040	.237	.128	.039	.227	.124	.038	.217	.120	.037	
4.0	.236	.123	.036	.231	.121	.036	.221	.117	.035	.212	.114	.034	.203	.110	.034	
5.0	.219	.112	.032	.215	.110	.032	.206	.107	.032	.198	.104	.031	.190	.102	.031	
6.0	.204	.102	.029	.200	.101	.029	.192	.099	.029	.185	.096	.028	.178	.094	.028	
7.0	.191	.094	.027	.187	.093	.027	.180	.091	.026	.174	.089	.026	.167	.087	.026	
8.0	.179	.087	.025	.175	.086	.024	.169	.085	.024	.163	.083	.024	.158	.081	.024	
9.0	.168	.081	.023	.165	.080	.023	.159	.079	.022	.154	.077	.022	.149	.076	.022	
10.0	.158	.076	.021	.156	.075	.021	.150	.074	.021	.146	.072	.021	.141	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.192	.170	.150	.164	.146	.129	.112	.100	.089	.065	.058	.052	.021	.019	.017	
2.0	.183	.145	.114	.157	.125	.098	.107	.087	.069	.062	.050	.040	.020	.016	.013	
3.0	.175	.128	.090	.150	.110	.078	.103	.076	.055	.059	.045	.032	.019	.014	.011	
4.0	.167	.114	.074	.143	.099	.064	.099	.069	.045	.057	.040	.027	.018	.013	.009	
5.0	.160	.104	.062	.137	.090	.054	.094	.063	.038	.055	.037	.023	.018	.012	.007	
6.0	.153	.095	.054	.131	.082	.047	.090	.058	.033	.052	.034	.020	.017	.011	.007	
7.0	.146	.088	.048	.125	.076	.042	.087	.054	.030	.050	.032	.018	.016	.010	.006	
8.0	.140	.082	.043	.120	.071	.038	.083	.050	.027	.048	.030	.016	.016	.010	.005	
9.0	.134	.077	.039	.115	.067	.034	.080	.047	.024	.047	.028	.015	.015	.009	.005	
10.0	.128	.073	.037	.111	.064	.032	.077	.045	.023	.045	.026	.014	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm										
NAME: 4 inch Gimbal					TYPE:			WEIGHT:		
SPEC.:5000K					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.065			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	28.3	29.8	28.6	30.0	30.2	28.2	29.6	28.5	29.8	30.1
3H	29.6	30.9	29.9	31.1	31.4	29.4	30.7	29.7	30.9	31.2
4H	30.0	31.3	30.3	31.5	31.8	29.8	31.0	30.1	31.3	31.6
6H	30.3	31.4	30.6	31.7	32.0	30.0	31.2	30.3	31.5	31.8
8H	30.3	31.4	30.6	31.7	32.0	30.0	31.1	30.4	31.4	31.8
12H	30.2	31.3	30.6	31.6	32.0	30.0	31.1	30.4	31.4	31.7
4H 2H	28.8	30.1	29.1	30.3	30.6	28.7	29.9	29.0	30.2	30.5
3H	30.2	31.3	30.6	31.6	32.0	30.0	31.1	30.4	31.5	31.8
4H	30.8	31.8	31.2	32.1	32.5	30.6	31.5	31.0	31.9	32.3
6H	31.1	32.0	31.5	32.4	32.8	30.9	31.7	31.3	32.1	32.5
8H	31.1	32.0	31.6	32.4	32.8	30.9	31.7	31.3	32.1	32.5
12H	31.1	31.9	31.6	32.3	32.7	30.9	31.6	31.4	32.1	32.5
8H 4H	30.9	31.7	31.4	32.1	32.5	30.7	31.5	31.2	31.9	32.4
6H	31.4	32.0	31.8	32.5	32.9	31.1	31.8	31.6	32.2	32.7
8H	31.4	32.0	31.9	32.5	33.0	31.2	31.8	31.7	32.3	32.7
12H	31.4	31.9	31.9	32.4	32.9	31.2	31.7	31.7	32.2	32.7
12H 4H	30.9	31.6	31.4	32.1	32.5	30.7	31.5	31.2	31.9	32.3
6H	31.4	32.0	31.9	32.4	32.9	31.1	31.7	31.6	32.2	32.7
8H	31.4	32.0	31.9	32.4	32.9	31.2	31.7	31.7	32.2	32.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.4 / - 0.3					+ 0.4 / - 0.3				

CIE Pub.117, 740.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)
 Area: 0.003 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	49	42	58	48	42	36
0.80	70	59	52	69	59	52	67	58	51	45
1.00	78	68	61	77	67	61	75	68	60	53
1.25	85	75	69	84	75	68	81	73	67	60
1.50	90	81	74	88	80	74	85	78	72	65
2.00	96	88	82	95	87	82	91	85	80	72
2.50	100	93	87	98	91	86	94	89	84	76
3.00	103	97	92	101	95	91	97	92	88	80
4.00	107	102	97	104	100	96	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:

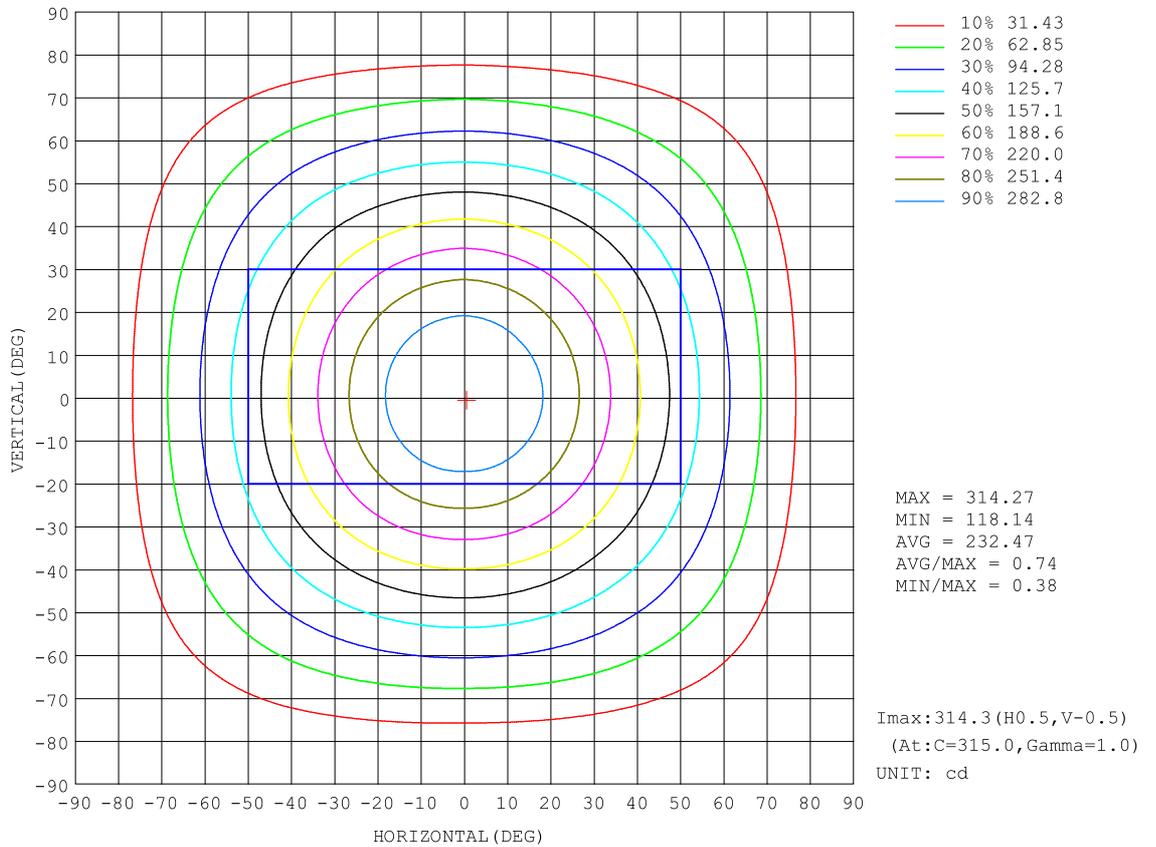


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:

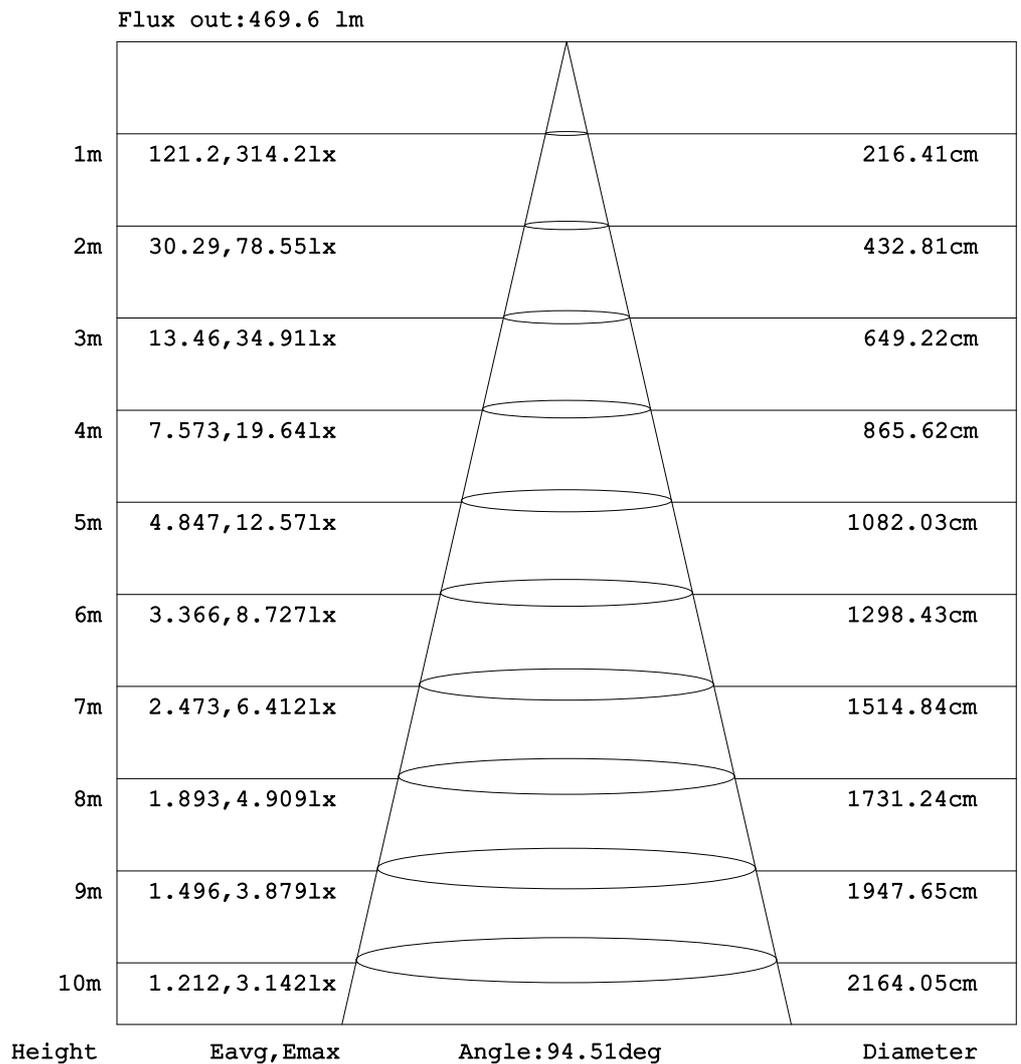


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.074m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:

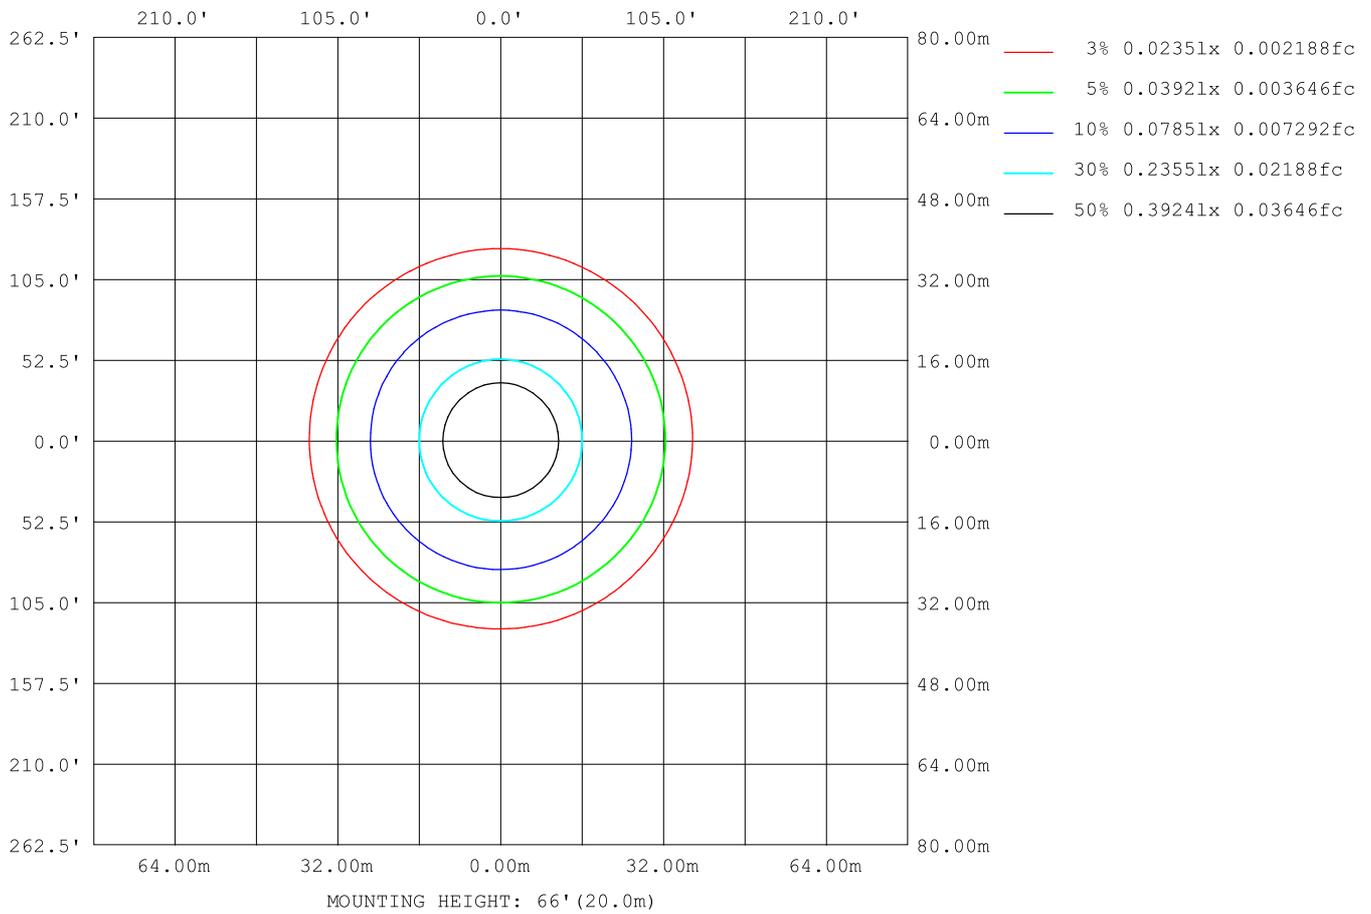

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	61382
L_0~180 (75) av	48487
L_0~180 (85) av	6706
L_90~270 (65) av	61661
L_90~270 (75) av	48557
L_90~270 (85) av	14777
L_45 (65) av	61527
L_45 (75) av	48531
L_45 (85) av	21254

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

Planar Illuminance Curve

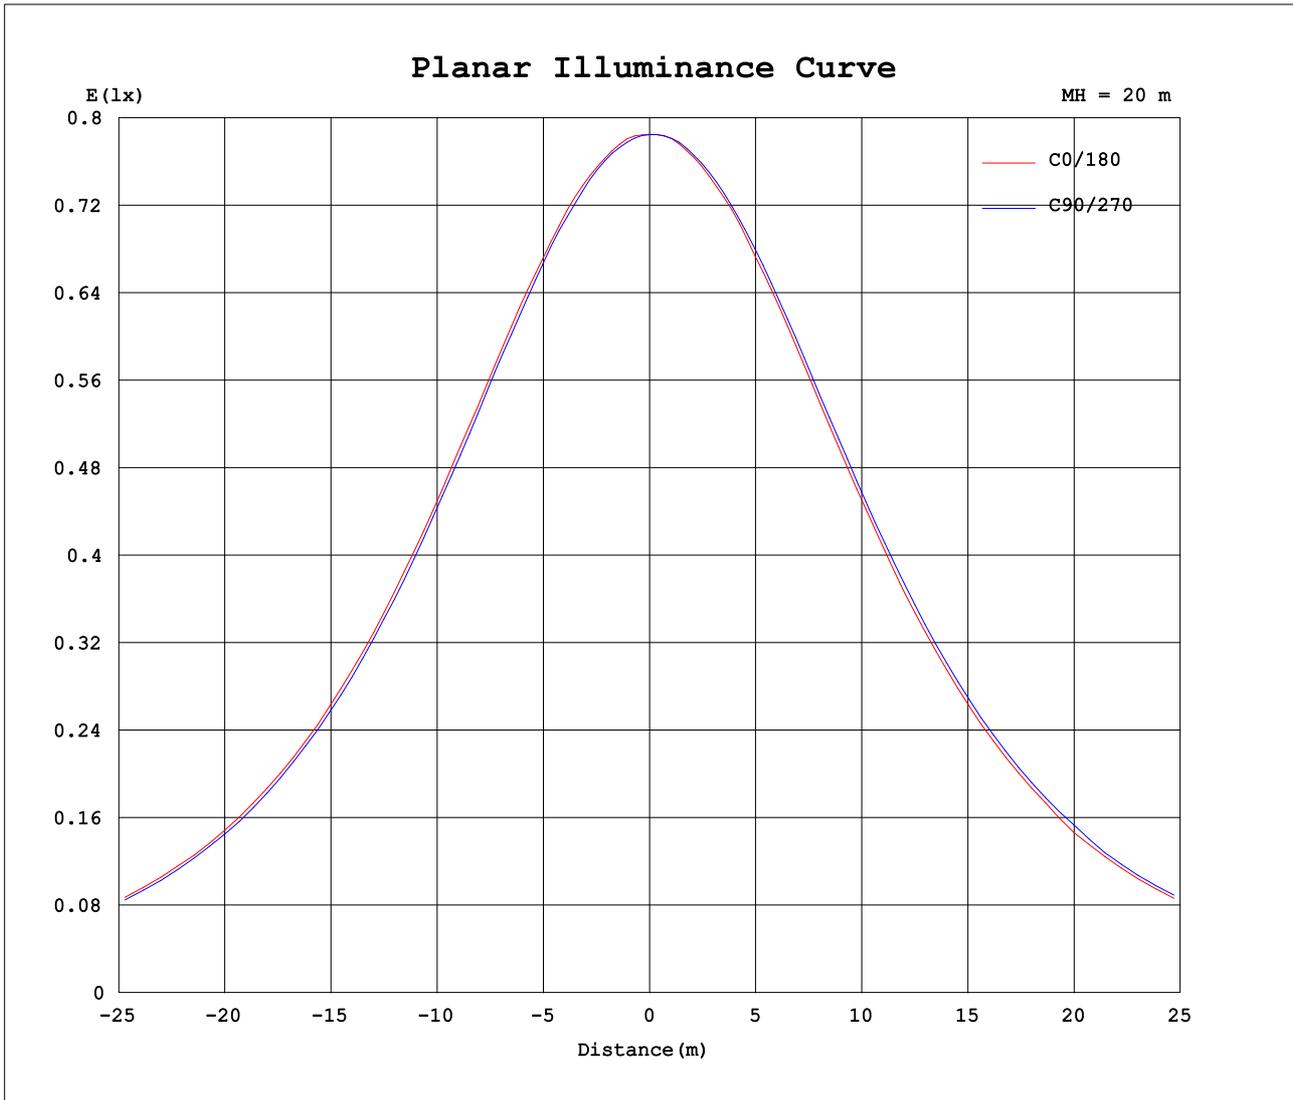

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.074m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.10V I:0.0820A P:9.6200W PF:0.9740 Freq:60.00Hz Lamp Flux:740.903x1 lm		
NAME: 4 inch Gimbal	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.065	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315											
0	314	314	314	314	314	314	314	314											
5	311	310	311	311	312	312	312	312											
10	304	303	302	304	304	305	306	305											
15	292	290	290	291	292	294	295	293											
20	276	274	274	276	277	279	280	278											
25	258	255	254	257	258	260	262	259											
30	237	234	233	236	237	239	242	238											
35	215	211	210	214	215	217	220	216											
40	192	189	188	191	192	194	197	193											
45	168	163	164	165	166	171	174	169											
50	145	140	141	142	143	148	148	147											
55	123	118	119	120	121	126	126	124											
60	100	96.4	96.9	98.5	99.3	103	104	102											
65	77.7	75.0	74.1	77.1	78.0	80.6	82.2	79.2											
70	56.9	54.4	53.4	56.5	57.4	59.9	61.4	58.4											
75	37.4	35.0	34.0	37.0	37.9	40.1	41.4	38.5											
80	18.8	17.8	17.0	19.6	19.5	22.2	23.1	20.7											
85	2.10	4.06	3.86	5.37	1.41	6.97	3.87	5.84											
90	1.53	1.58	1.58	1.59	0.84	0.95	0.82	0.85											
95	1.58	1.62	1.62	1.63	0.97	0.93	0.95	0.95											
100	1.67	1.71	1.70	1.72	1.12	1.08	1.10	1.10											
105	1.76	1.79	1.79	1.80	1.29	1.24	1.25	1.26											
110	1.86	1.89	1.89	1.90	1.47	1.42	1.43	1.44											
115	1.96	1.99	1.99	2.00	1.65	1.60	1.62	1.63											
120	2.05	2.09	2.09	2.10	1.84	1.78	1.80	1.81											
125	2.14	2.18	2.18	2.20	2.02	1.96	1.98	1.99											
130	2.25	2.28	2.28	2.29	2.19	2.13	2.17	2.17											
135	2.35	2.38	2.39	2.39	2.37	2.31	2.35	2.34											
140	2.46	2.50	2.51	2.51	2.53	2.47	2.51	2.52											
145	2.58	2.62	2.64	2.64	2.69	2.64	2.67	2.68											
150	2.72	2.75	2.76	2.76	2.85	2.79	2.82	2.82											
155	2.85	2.87	2.88	2.89	2.98	2.93	2.96	2.94											
160	2.98	2.99	3.01	3.02	3.10	3.05	3.09	3.07											
165	3.09	3.10	3.13	3.13	3.21	3.14	3.19	3.16											
170	3.20	3.21	3.22	3.23	3.31	3.23	3.28	3.25											
175	3.29	3.29	3.30	3.30	3.36	3.30	3.36	3.31											
180	3.36	3.33	3.37	3.35	3.37	3.33	3.37	3.35											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-07-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks: