
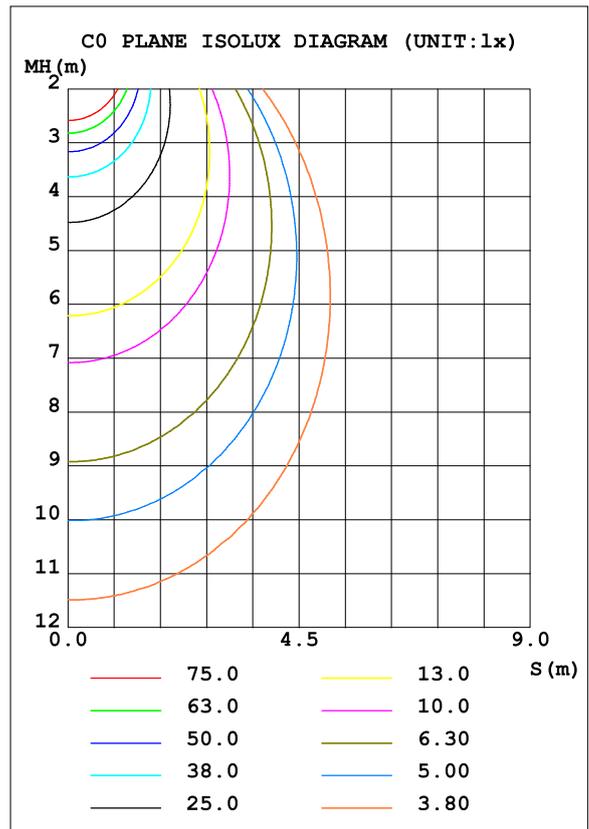


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	501.3	S/MH (C0/180)	1.13
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1179.1	η UP, DN (C0-180)	0.9, 50.2
NOMINAL FLUX (lm)	1179.11	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 48.1
LAMPS INSIDE	1	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.0	η down (%)	98.3	CIBSE SHR MAX	1.30

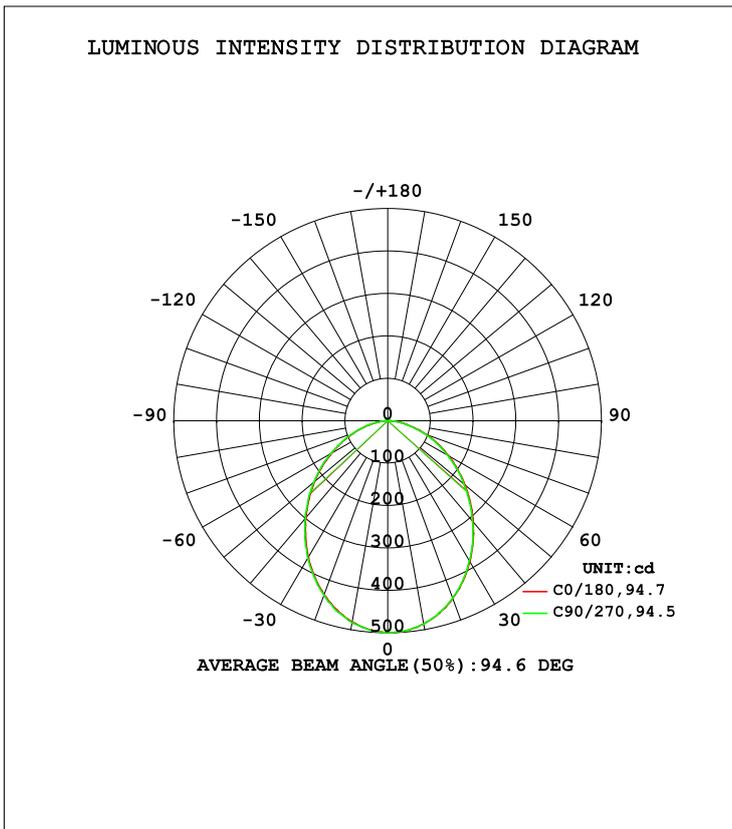

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.074m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	486.3	488.2	486.4	484.2	481.1	480.2	482.8	482.8	0- 10	46.91	46.91	3.98,3.98
20	445.1	447.6	444.4	441.4	435.9	435.1	437.2	439.5	10- 20	131.0	177.9	15.1,15.1
30	384.2	386.3	381.8	379.2	371.3	369.5	374.3	375.3	20- 30	189.1	367.0	31.1,31.1
40	311.1	312.9	308.4	305.9	296.9	295.9	299.3	302.7	30- 40	213.7	580.7	49.2,49.2
50	236.3	237.9	233.3	230.3	223.3	222.3	225.8	227.9	40- 50	205.9	786.5	66.7,66.7
60	164.2	162.8	160.7	156.1	149.4	150.7	151.8	156.2	50- 60	172.6	959.1	81.3,81.3
70	96.71	95.77	93.91	90.45	84.49	83.81	86.96	89.53	60- 70	121.5	1081	91.7,91.7
80	37.89	38.28	35.59	33.84	28.83	28.50	31.24	32.50	70- 80	63.87	1145	97.1,97.1
90	2.604	2.622	2.354	2.340	1.360	1.357	1.344	1.313	80- 90	14.54	1159	98.3,98.3
100	2.581	2.582	2.577	2.602	1.834	1.819	1.808	1.755	90-100	2.195	1161	98.5,98.5
110	2.885	2.893	2.886	2.905	2.392	2.383	2.364	2.300	100-110	2.543	1164	98.7,98.7
120	3.215	3.208	3.196	3.215	2.973	2.941	2.946	2.874	110-120	2.824	1167	98.9,98.9
130	3.519	3.521	3.516	3.516	3.542	3.515	3.508	3.439	120-130	2.949	1170	99.2,99.2
140	3.873	3.880	3.876	3.882	4.069	4.029	4.048	3.982	130-140	2.884	1172	99.4,99.4
150	4.286	4.281	4.280	4.286	4.535	4.494	4.500	4.452	140-150	2.616	1175	99.7,99.7
160	4.702	4.674	4.691	4.669	4.934	4.884	4.905	4.826	150-160	2.120	1177	99.8,99.8
170	5.084	5.033	5.039	5.034	5.244	5.159	5.200	5.116	160-170	1.400	1179	100,100
180	5.330	5.274	5.290	5.257	5.347	5.254	5.298	5.248	170-180	0.4954	1179	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:

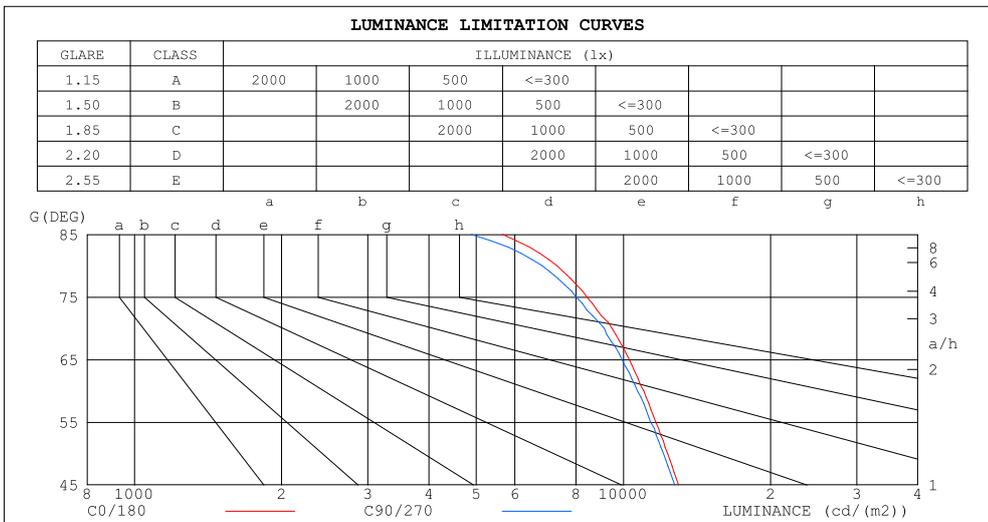

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5661	4886
80	7308	6817
75	8425	7997
70	9471	9132
65	10277	9937
60	11001	10687
55	11640	11359
50	12313	12070
45	12967	12742


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0														
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98														
1.0	1.05	1.01	.97	1.02	.99	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84														
2.0	.92	.86	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.76	.73	.71														
3.0	.81	.74	.68	.80	.73	.67	.77	.70	.65	.74	.68	.64	.71	.67	.63	.61														
4.0	.73	.64	.58	.71	.63	.57	.68	.62	.56	.66	.60	.55	.64	.59	.55	.52														
5.0	.65	.57	.50	.64	.56	.50	.62	.55	.49	.60	.53	.49	.58	.52	.48	.46														
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.43	.54	.48	.43	.52	.47	.42	.40														
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.38	.48	.42	.38	.36														
8.0	.49	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.34	.44	.39	.34	.32														
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.29														
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.32	.28	.27														

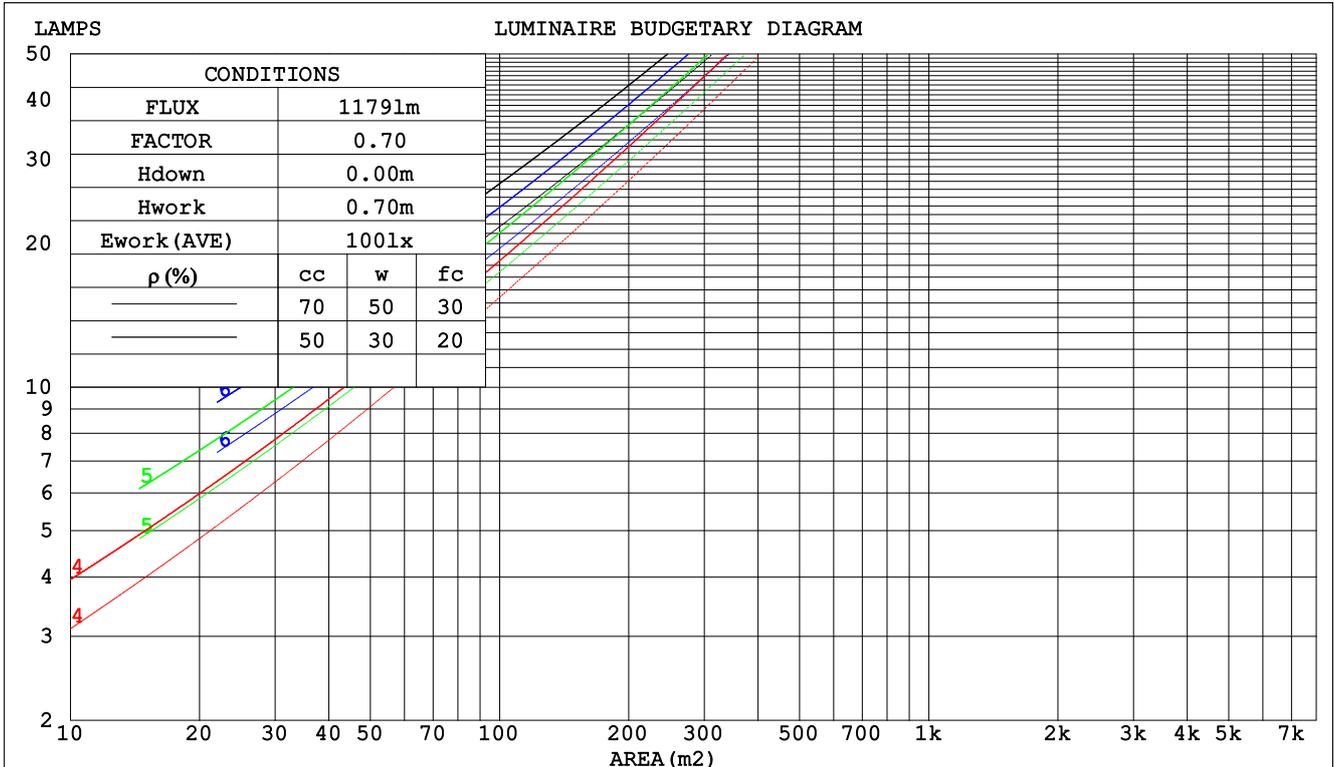

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm															
NAME: 6 inch 360° downlight						TYPE:						WEIGHT:			
SPEC.:5000K						DIM.:						SERIAL No.:			
MFR.: EVERFINE						SUR.:0.1						Shielding Angle:			

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.287	.163	.052	.279	.159	.051	.265	.152	.049	.252	.145	.047	.240	.139	.045	
2.0	.273	.149	.046	.266	.146	.045	.254	.141	.044	.242	.136	.043	.231	.131	.041	
3.0	.254	.135	.041	.248	.133	.040	.237	.129	.039	.227	.124	.038	.218	.121	.037	
4.0	.236	.123	.036	.231	.121	.036	.221	.117	.035	.212	.114	.034	.204	.111	.034	
5.0	.219	.112	.032	.215	.110	.032	.206	.107	.032	.198	.104	.031	.190	.102	.031	
6.0	.204	.102	.029	.200	.101	.029	.192	.099	.029	.185	.096	.028	.178	.094	.028	
7.0	.191	.094	.027	.187	.093	.027	.180	.091	.026	.174	.089	.026	.167	.087	.026	
8.0	.179	.087	.025	.175	.086	.024	.169	.085	.024	.163	.083	.024	.158	.081	.024	
9.0	.168	.081	.023	.165	.080	.023	.159	.079	.022	.154	.077	.022	.149	.076	.022	
10.0	.158	.076	.021	.156	.075	.021	.150	.074	.021	.146	.072	.021	.141	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.192	.169	.149	.164	.145	.128	.112	.100	.089	.065	.058	.052	.021	.019	.017	
2.0	.183	.145	.113	.157	.125	.098	.107	.086	.068	.062	.050	.040	.020	.016	.013	
3.0	.175	.127	.090	.150	.110	.078	.103	.076	.055	.059	.045	.032	.019	.014	.011	
4.0	.167	.114	.074	.143	.098	.064	.098	.069	.045	.057	.040	.027	.018	.013	.009	
5.0	.159	.103	.062	.137	.090	.054	.094	.063	.038	.055	.037	.023	.018	.012	.007	
6.0	.152	.095	.054	.131	.082	.047	.090	.058	.033	.052	.034	.020	.017	.011	.007	
7.0	.146	.088	.048	.125	.076	.042	.087	.054	.029	.050	.032	.018	.016	.010	.006	
8.0	.140	.082	.043	.120	.071	.037	.083	.050	.027	.048	.030	.016	.016	.010	.005	
9.0	.134	.077	.039	.115	.067	.034	.080	.047	.024	.046	.028	.015	.015	.009	.005	
10.0	.128	.073	.036	.110	.063	.032	.077	.045	.023	.045	.026	.013	.014	.009	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm										
NAME: 6 inch 360° downlight					TYPE:			WEIGHT:		
SPEC.:5000K					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.6	22.0	20.9	22.3	22.5	20.5	22.0	20.8	22.2	22.4
3H	21.9	23.2	22.2	23.5	23.8	21.8	23.1	22.1	23.4	23.6
4H	22.4	23.7	22.8	23.9	24.2	22.3	23.5	22.6	23.8	24.1
6H	22.8	23.9	23.1	24.2	24.5	22.6	23.8	22.9	24.0	24.4
8H	22.8	24.0	23.2	24.3	24.6	22.7	23.8	23.0	24.1	24.4
12H	22.9	24.0	23.3	24.3	24.6	22.7	23.8	23.1	24.1	24.4
4H 2H	21.1	22.4	21.5	22.7	23.0	21.1	22.3	21.4	22.6	22.9
3H	22.6	23.7	23.0	24.0	24.4	22.5	23.6	22.9	23.9	24.3
4H	23.2	24.2	23.6	24.6	24.9	23.1	24.1	23.5	24.4	24.8
6H	23.7	24.6	24.1	25.0	25.4	23.5	24.4	24.0	24.8	25.2
8H	23.8	24.7	24.3	25.0	25.5	23.7	24.5	24.1	24.9	25.3
12H	23.9	24.7	24.4	25.1	25.5	23.7	24.5	24.2	24.9	25.3
8H 4H	23.5	24.3	23.9	24.7	25.1	23.3	24.1	23.8	24.5	25.0
6H	24.0	24.7	24.5	25.1	25.6	23.9	24.6	24.4	25.0	25.5
8H	24.3	24.8	24.7	25.3	25.8	24.1	24.7	24.6	25.1	25.6
12H	24.4	24.9	24.9	25.4	25.9	24.2	24.7	24.7	25.2	25.7
12H 4H	23.5	24.2	23.9	24.6	25.1	23.3	24.1	23.8	24.5	24.9
6H	24.1	24.7	24.6	25.1	25.6	23.9	24.5	24.4	25.0	25.5
8H	24.3	24.8	24.8	25.3	25.8	24.2	24.7	24.7	25.1	25.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 1179 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.6)
 Area: 0.03 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	42	59	49	42	58	48	42	36
0.80	70	59	52	69	59	52	67	58	51	45
1.00	78	68	61	77	67	61	75	68	60	53
1.25	85	75	69	84	75	68	81	73	67	60
1.50	90	81	74	88	80	74	85	78	72	65
2.00	96	88	82	94	87	82	91	85	80	72
2.50	100	93	87	98	91	86	94	88	84	76
3.00	103	97	92	101	95	90	97	92	88	79
4.00	107	102	97	104	100	96	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:

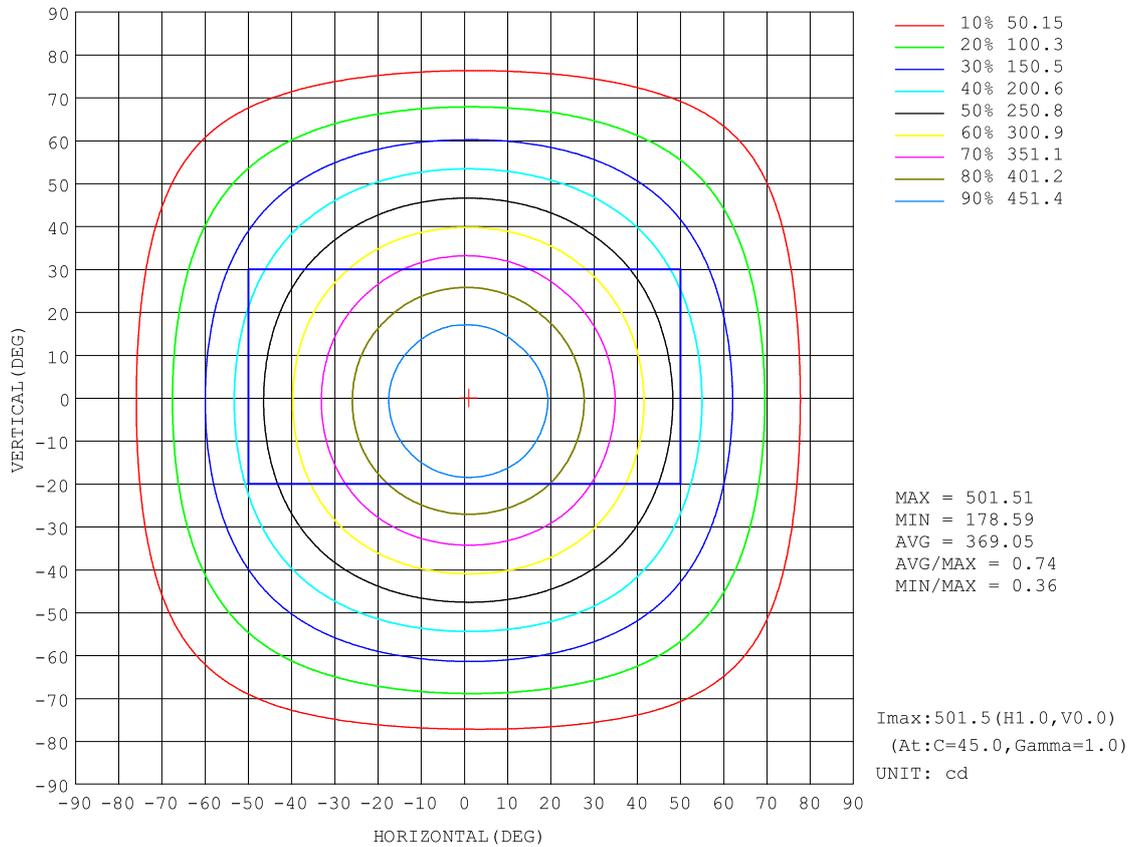


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:

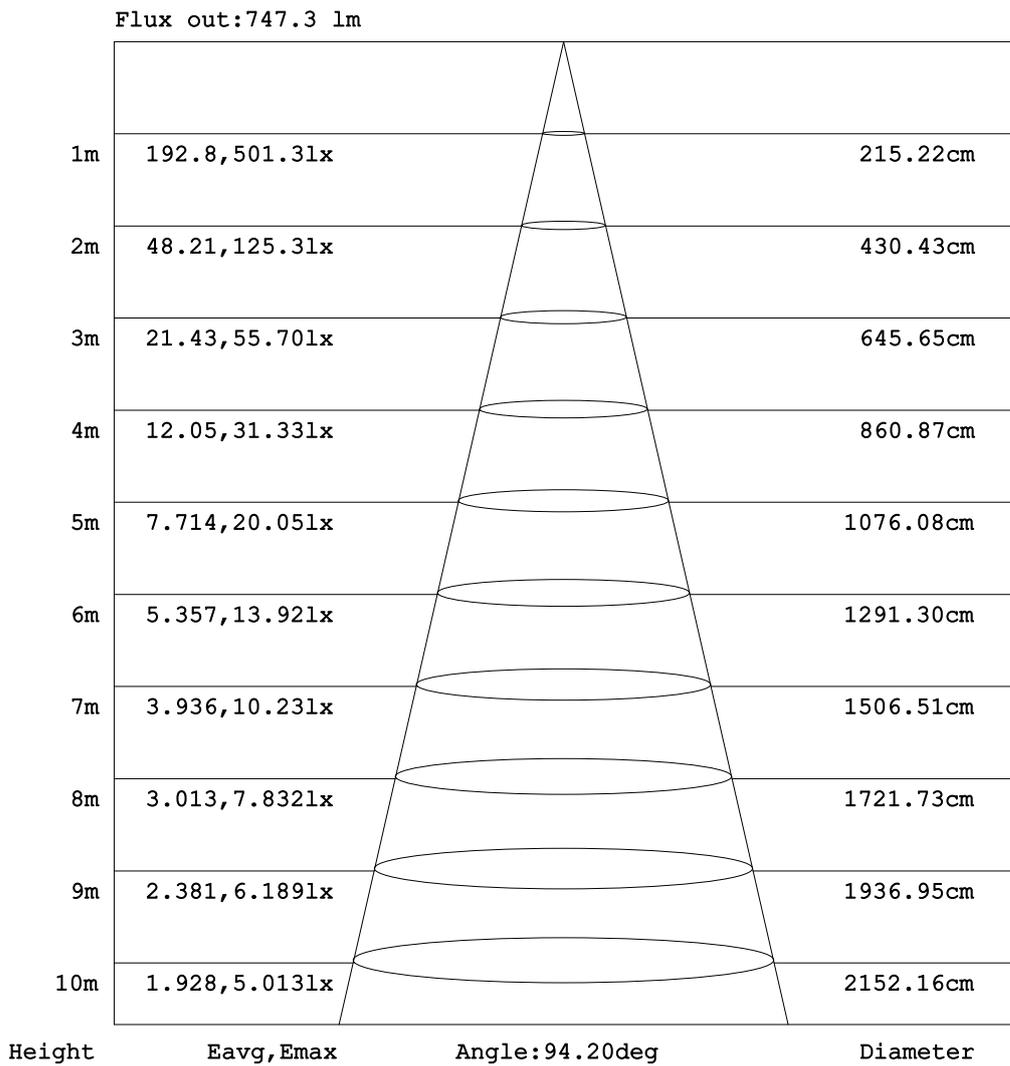


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.074m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:

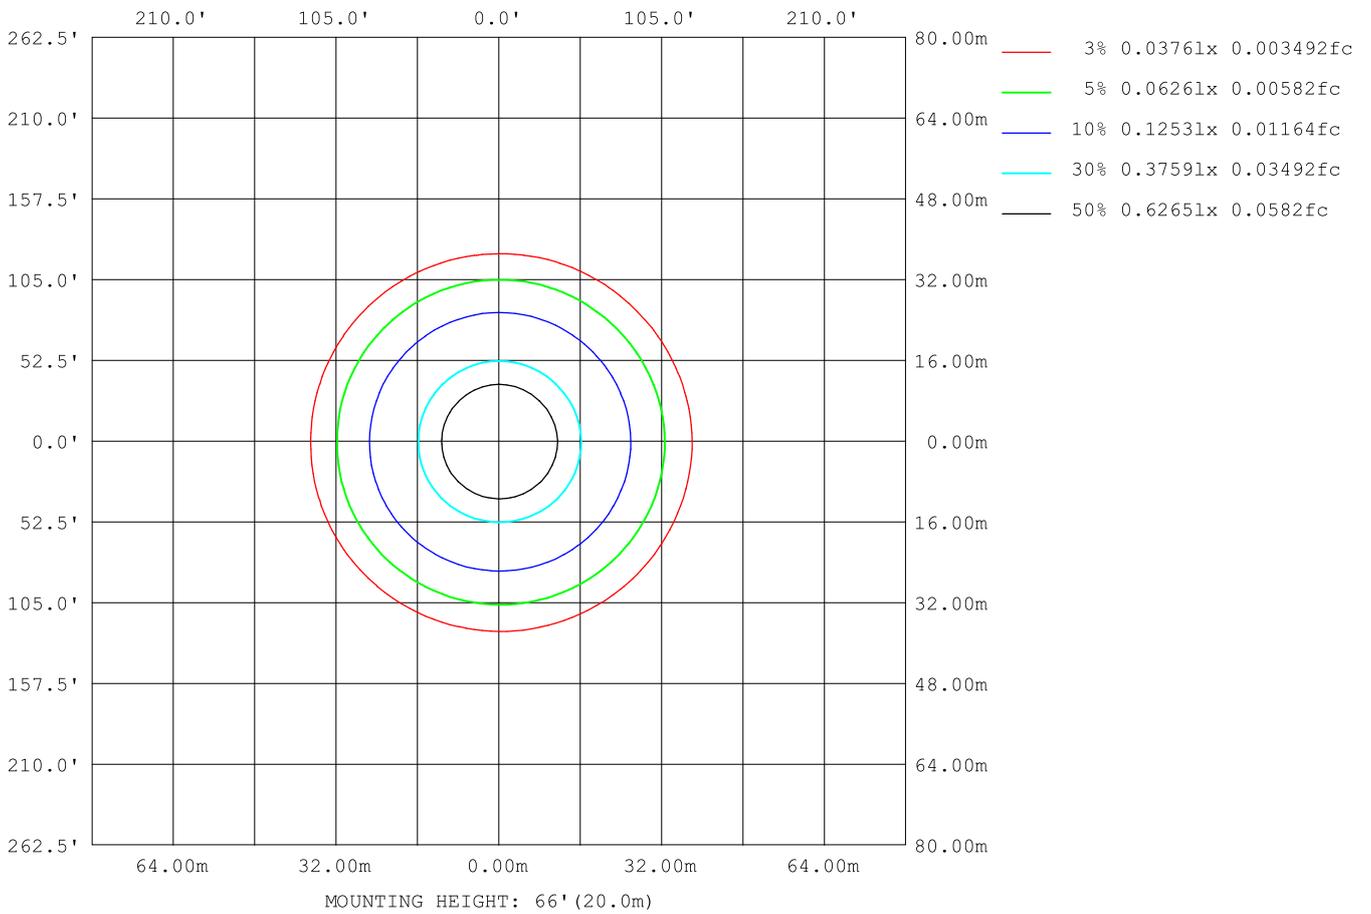

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9699
L_0~180 (75) av	7732
L_0~180 (85) av	4286
L_90~270 (65) av	9654
L_90~270 (75) av	7709
L_90~270 (85) av	4236
L_45 (65) av	9661
L_45 (75) av	7724
L_45 (85) av	4250

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks:

Planar Illuminance Curve

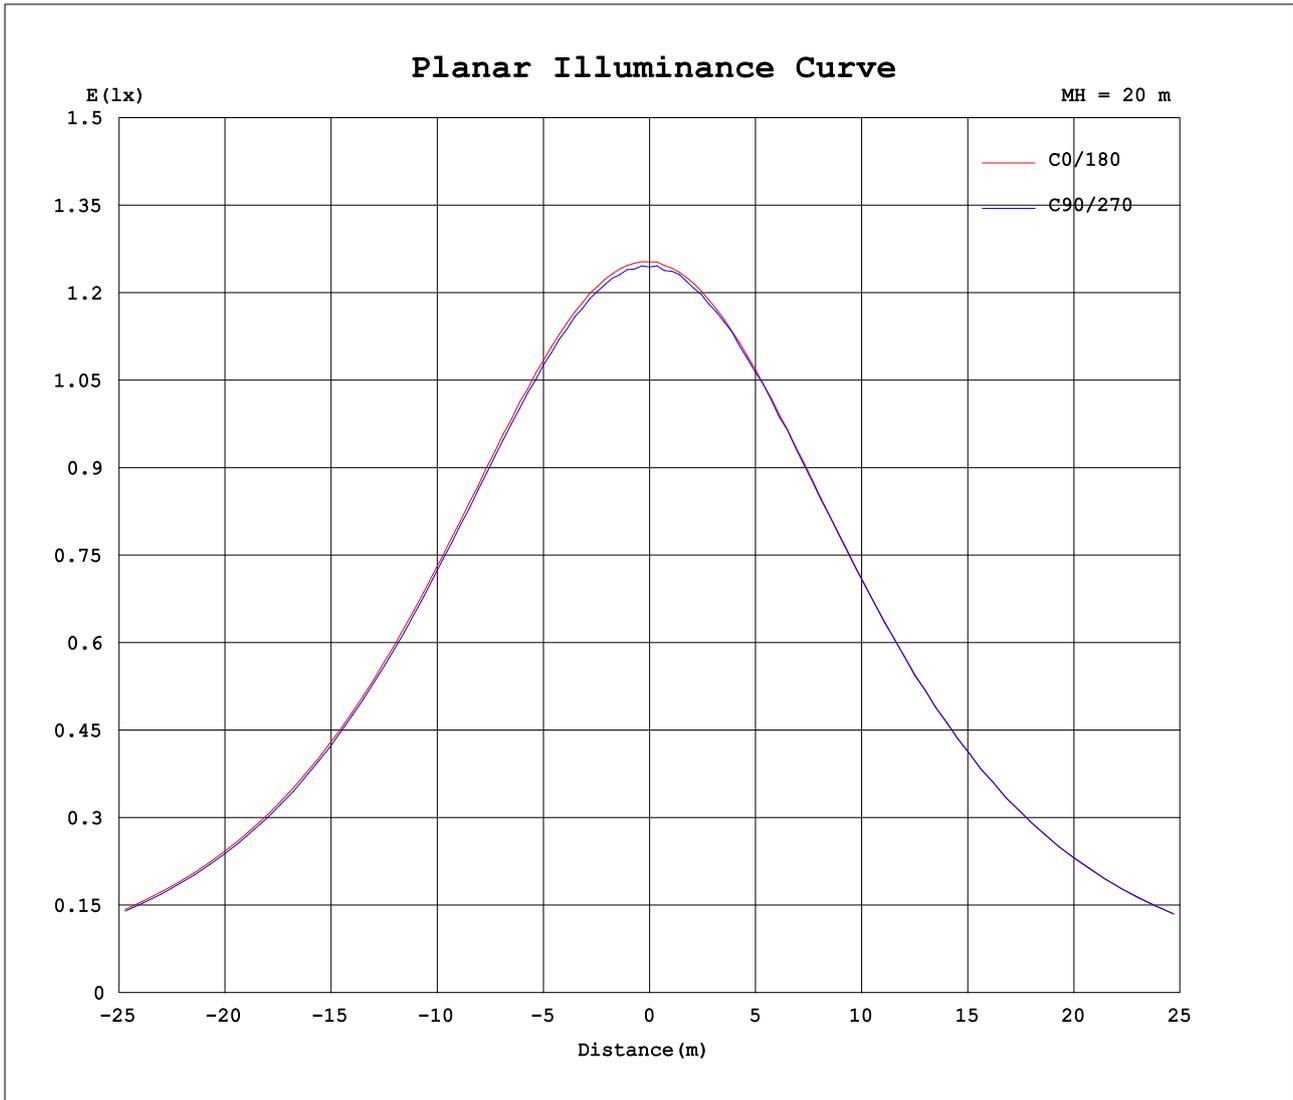

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.074m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.1210A P:14.300W PF:0.9860 Freq:60.00Hz Lamp Flux:1179.11x1 lm		
NAME: 6 inch 360° downlight	TYPE:	WEIGHT:
SPEC.:5000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315											
0	499	499	499	499	499	499	499	499											
5	496	497	497	495	494	494	494	494											
10	486	488	486	484	481	480	483	483											
15	469	472	468	467	461	462	464	464											
20	445	448	444	441	436	435	437	439											
25	417	419	415	413	406	404	407	409											
30	384	386	382	379	371	370	374	375											
35	348	351	347	343	335	334	339	340											
40	311	313	308	306	297	296	299	303											
45	274	275	271	269	260	259	263	265											
50	236	238	233	230	223	222	226	228											
55	199	201	196	195	187	186	189	191											
60	164	163	161	156	149	151	152	156											
65	130	128	126	122	116	117	119	122											
70	96.7	95.8	93.9	90.5	84.5	83.8	87.0	89.5											
75	65.1	65.7	62.2	60.4	55.0	54.7	57.5	59.1											
80	37.9	38.3	35.6	33.8	28.8	28.5	31.2	32.5											
85	14.7	15.0	12.8	11.6	7.68	7.48	9.35	10.4											
90	2.60	2.62	2.35	2.34	1.36	1.36	1.34	1.31											
95	2.44	2.45	2.43	2.47	1.58	1.57	1.56	1.52											
100	2.58	2.58	2.58	2.60	1.83	1.82	1.81	1.75											
105	2.73	2.73	2.73	2.75	2.10	2.09	2.07	2.02											
110	2.89	2.89	2.89	2.91	2.39	2.38	2.36	2.30											
115	3.05	3.04	3.04	3.06	2.68	2.66	2.66	2.59											
120	3.21	3.21	3.20	3.21	2.97	2.94	2.95	2.87											
125	3.37	3.35	3.36	3.37	3.26	3.23	3.23	3.16											
130	3.52	3.52	3.52	3.52	3.54	3.52	3.51	3.44											
135	3.69	3.68	3.69	3.70	3.82	3.78	3.78	3.72											
140	3.87	3.88	3.88	3.88	4.07	4.03	4.05	3.98											
145	4.08	4.08	4.07	4.08	4.32	4.27	4.29	4.23											
150	4.29	4.28	4.28	4.29	4.54	4.49	4.50	4.45											
155	4.50	4.49	4.48	4.49	4.76	4.71	4.72	4.65											
160	4.70	4.67	4.69	4.67	4.93	4.88	4.91	4.83											
165	4.91	4.87	4.87	4.85	5.10	5.03	5.05	4.98											
170	5.08	5.03	5.04	5.03	5.24	5.16	5.20	5.12											
175	5.22	5.19	5.20	5.17	5.33	5.23	5.28	5.21											
180	5.33	5.27	5.29	5.26	5.35	5.25	5.30	5.25											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.074m [K=1.0000]
 Remarks: