

TWIST-LOCK ELECTRONIC TYPE PHOTO CONTROL MODEL: LT134

INTRODUCTION

LEAD TOP's Long-Life&Zero-Crossing photocontrols were designed for the demands of HID and solid-state lighting (SSL), making them an excellent choice for LED, conventional & Electronic HID, and Induction luminaires.



APPLICATIONS

- LED luminaires that require dusk to dawn control.
- Recommended for luminaires that use solid state ballasts/drivers (e.g. CFL, Induction, Electronic HID).
- LED, HID, Induction, Fluorescent or Halogen Systems; Roadways; Street Lighting; Parking Lots; Security Lighting.

FEATURES

- Meets or exceeds ANSI C136.10
- ANSI Long-Life Photocontrol
- Zero-Crossing Detection
- High Inrush Current Protection
- UL94 V-0 Flame Resistance
- ROHS compliant
- Manufactured according to ISO
- IR Filter Phototransistor
- FR4 fiberglass printed circuit board
- Reliable sealed relay
- MOV rated from 475 Joules
- Insulation Resistance: >500MΩ
- 3-5 second turn-off delay.
- Blue cover standard (other color option)
- IP66, optional IP67
- Will operated down to 85VAC
- 3.0mm Thickness Cover

TECHNICAL SPECIFICATION


Standard	ANSI C136.10 & UL773
Rated Volts	120V-277V (Applicable: 105-305V)
Frequency	50/60 Hz
Rated Load	1000W/1800VA
LED Rating	8A E-Ballast @ 120VAC 5A E-Ballast @ 208-277VAC
Turn-On Light Levels	10-16 Lux
ON/OFF Ratio	1:1.5
Time Delay	3-5 Seconds
Operating Temperature	-40°C to +70°C
Switch	> 10000 ON/OFF Operations at Rated Load
Light Sensor	IR Filter Phototransistor
Power Consumption	Avg. ≤ 0.5 watts at 120VAC
Cover	Anti-UV Impact Resistance Polypropylene
Base	High Temperature Resistance Polybutylene Terephthalate (PBT)

PRODUCT SELECTION INFORMATION


Model	Color	Turn-On (fc)	Time Delay	Fail Mode	MOV Rating	IP Grade
LT134	BU: Blue(Std.) BK: Black GY: Grey GN: Green	F15: 1.5(≈15Lux)(Std.) F25: 2.5(≈26Lux) F35: 3.5(≈37Lux)	D05: 3-5s(Std.) D10:10-15s D20:20-25s D30:30-35s	NO: Fail Off(Std.) NC: Fail On	M475: 475J(Std.) M525: 525J M950: 950J	66:IP66(Std.) 67: IP67

FREQUENTLY ORDERED PART NUMBER: **LT134-BU-F15-D05-NO-M475-66**

DIMENSION

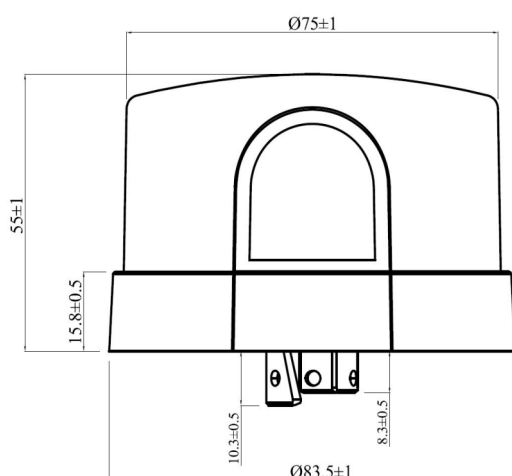

WIRING DIAGRAM

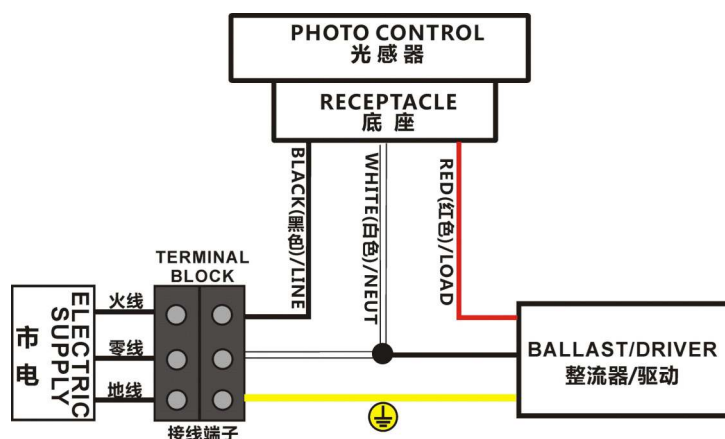

PRODUCT DETAILS:

- 1) Photocontrol: Shall be a Twist Locking Type and meet or exceed all requirements of ANSI C136.10 .
- 2) For standard photocontrols, the cover color will be blue cover or are available as specified by customer.
- 3) Line voltage: 105-305 VAC @ 50/60HZ.
- 4) Load rating: Shall be at least 1800VA. Control must be able to operate incandescent, ballast, LED and lighting contractor type loads.
- 5) Control relay: Shall be sealed.
- 6) Turn ON: Shall be 10-16 LUX and Turn OFF shall be 1.5 times the turn ON level as standard configuration.
- 7) Time delay: Control must have instant ON and 3-6 seconds "OFF" delay as standard configuration.
- 8) Programmable as specified by customer for Time Delay, Turn ON/OFF level and ON/OFF ratio.
- 9) Zero-Crossing Detection protects against high In-Rush currents, particularly found in LED Luminaries.
- 10) Photo sensor: Sealed silicon sensor. Cadmium sulfide cells are not acceptable.
- 11) Housing: Shall be blue (or customization) of an impact and UV resistant Polypropylene material @ 3mm thickness.
- 12) Drop test: Control must withstand a drop of 1 m to a concrete floor without causing damage to the housing or changing electrical operation.
- 13) Markings: The following must appear on the control: month/year of manufacture, individual serial numbers, model description, operating voltage range and load rating.
- 14) Power consumption: Shall consume 0.5 watts or less at 120VAC.
- 15) Environmental: Shall be RoHS compliant. It shall not contain lead, cadmium, mercury or hexavalent chromium. Pigments in plastic parts shall not contain bromine compounds or heavy metal pigments.
- 16) Warranty: 8 years (one for one replacement, labor not included).