




Compact size without sacrificing performance

- 150 LPW, 11,700 to 60,000 lumens.
- Field-adjustable Power.
- DC 12V sensor receptacle pre-installed.
- Non-CLASS 2 driver with OTP function.
- 6kV High level surge protection.




Quick turnaround to smart lighting

Both standalone and Bluetooth plug & play sensors available thanks to the receptacle.



Light distribution changeable

General and Aisle light distribution changeable by quickly replacing lens¹.

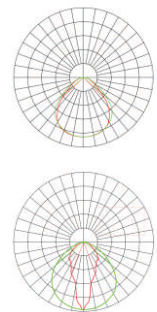

Specifications

UL Listing:

Suitable for damp locations

LEDs:

Long-life, high-efficacy, micro-power LEDs

Lifespan:

Lumen Maintenance, L70 > 100,000 hours

Housing and Lens:

Sheet metal stamping, PC optical glare-control lens **Ambient Operating**


Temperature:

-20°C/-4°F to 50°C/122°F when fixture is suspended at least 18" from ceiling.

Finish:

Long lasting white with high durability **Dimming Driver:**

- Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.
- Surge protection: L-N: 6kV; L/N-GND: 6kV
- Over temperature protection

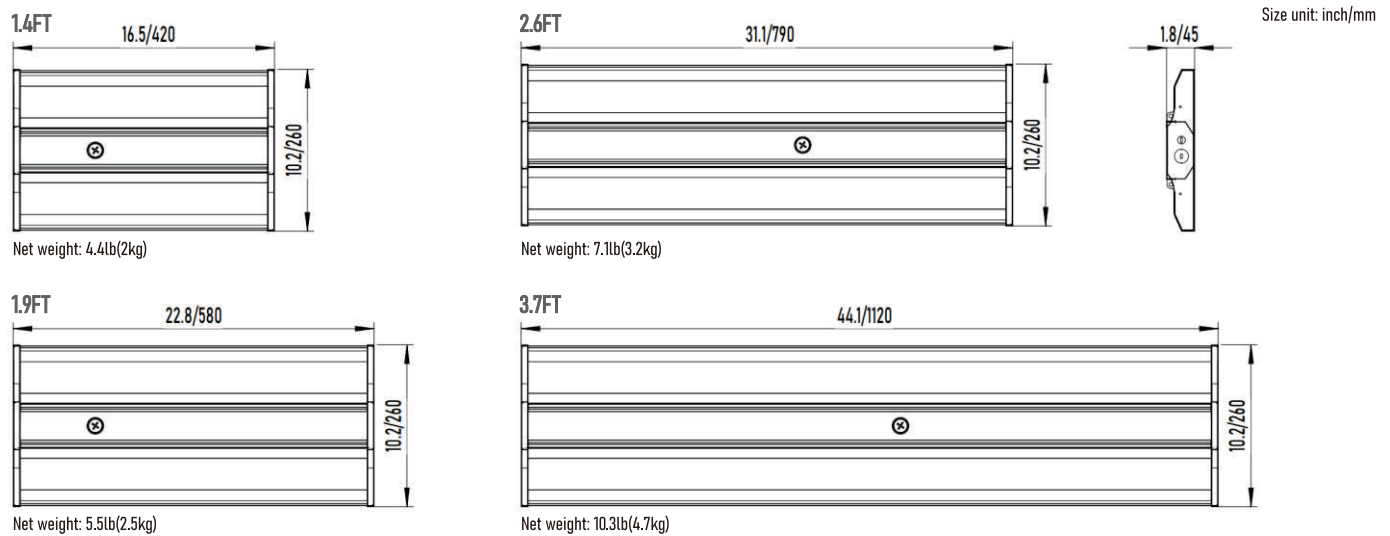

SELECTABLE TABLE

Product Series	Catalog No.	Lumens Rated	Watts Rated
Field-adjustable Power, fixed CCT(4000K or 5000K)	ETLB5B2-1.4/2/25F/115/092/078/RD1/8xx/U/AU2	17,250/13,800/11,700	115/92/78
	ETLB5B2-1.4/2/27F/135/115/100/RD1/8xx/U/AU2	20,250/17,250/15,000	135/115/100
	ETLB5B2-1.9/2/27H/200/185/155/RD1/8xx/U/AU2	30,000/27,750/23,250	200/185/155
	ETLB5B2-2.6/2/27L/270/230/200/RD1/8xx/U/AU2 ETLB5B2-	40,500/34,500/30,000	270/230/200
	3.7/2/27R/400/340/270/RD1/8xx/U/AU2 ETLB5B2-	60,000/51,000/40,500	400/340/270
Field-adjustable Power & CCT(4000K/5000K switchable)	1.4/2/25F/115/92/78/RD1/CCT/U/AU2 ETLB5B2-	17,250/13,800/11,700	115/92/78
	1.4/2/27F/135/115/100/RD1/CCT/U/AU2	20,250/17,250/15,000	135/115/100
	ETLB5B2-1.9/2/27H/200/185/155/RD1/CCT/U/AU2	30,000/27,750/23,250	200/185/155
	ETLB5B2-2.6/2/27L/270/230/200/RD1/CCT/U/AU2	40,500/34,500/30,000	270/230/200
	ETLB5B2-3.7/2/27R/400/340/270/RD1/CCT/U/AU2	60,000/51,000/40,500	400/340/270

Accessories

Optional Accessories	V hooks & Chain suspending mount kit(Figure 1)
	Cable suspending mount kit(Figure 2)
	Pendant hanger installation box (Figure 3)
	Surface mount kit(Figure 4)
	Wire guards(Figure 5)




Figure 1




Figure 2




Figure 3




Figure 4




Figure 5

Ordering Information

ORDERING EXAMPLE:

ETLB5B2-1.9/2/27H/200/185/155/RD1/CCT/U/AU2/F1/A3/B3/Sx/EMx

Product Series	Size	Module Qty.	Module Power type		Distribution	CCT	Input voltage	12V AUX	Other Items/Options
ETLB5B2	1.9FT	2	27H	200/185/155	RD1	CCT	U	AU2	F1,A3,B3,Sx,EMx
ETLB5 B	1.4FT	2	25F 27F 27H ... (Defined by Ever-Tie)	200/185/155 (Switchable Power)	RD1 General	CCT 80 CRI, 4000K/5000K switchable	U 120-277	AU1 without 12V AUX	F1 10% Flicker
2	1.9FT				EL1 Aisle	840 80 CRI, 4000K (Neutral)	3 120-347	AU2 with 12V AUX	A3 Driver code
	2.6FT					850 80 CRI, 5000K (Cool)	4 277-480		B3 LED code
	3.7FT								Sx Sensor code
									EMN NON Battery Backup
									EMx Battery Backup code

[1] UGR<28 @ General light distribution, compliant with DLC5.1 Premium.