



C-FOX-GL39




High Feature

- Die-cast Aluminum Housing
- Epoxy powder paint Bronze(ORB)finish
- ETL listed
- General light pole components
- There is a memory function that remembers the last selected value when powered on
- Power is on, no extinguishment mode
- Easy installation
- Long lifespan
- Save energy


Optical/Electrical Data

Model No	C-FOX-GL39
Wattage	3W
Voltage	12-24V AC/DC
LED Type	SMD2835
Lumens	110lm
Color Temp	5CCT
CRI	>80Ra
Lifespan	50.000hrs
Working temp	-4°F-104°F
Beam Angle	350°
Body Material	Aluminum
Lens Material	PC
Wet Location	IP65

Dimensions

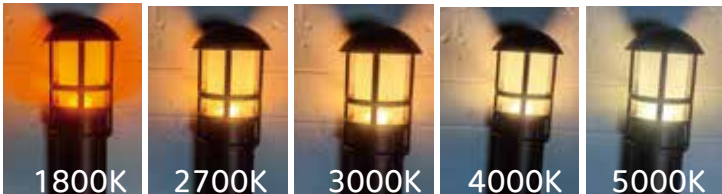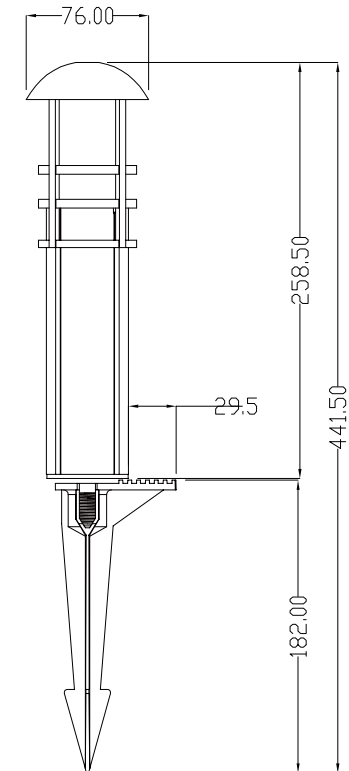


Installation Instruction

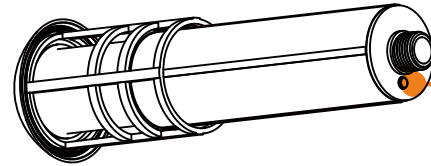

CCT Control Button
5 color temperature selectable: 1800K, 2700K, 3000K, 4000K & 5000K



Wiring with wire nuts

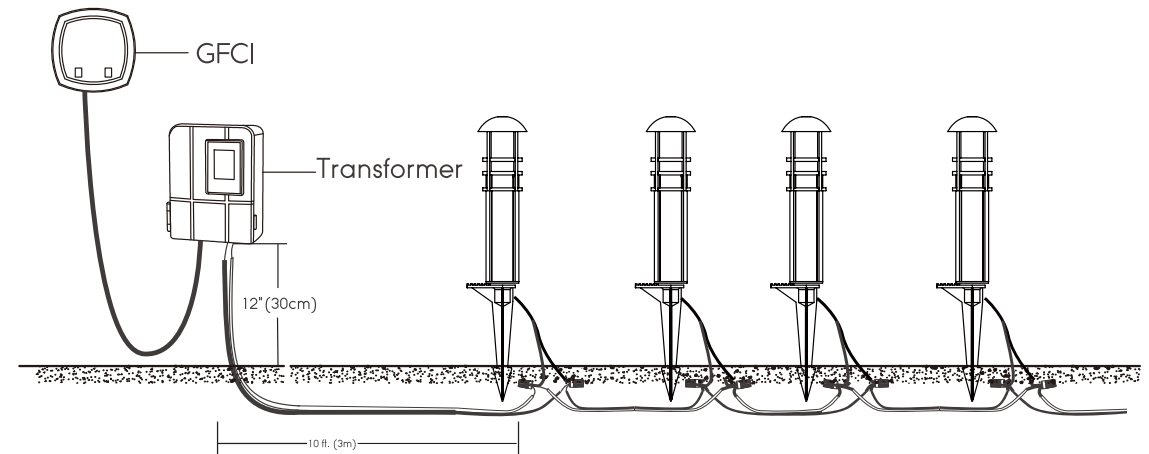

Note: For consistent brightness, keep the first fixture at least 10ft (3 meters) away from the transformer (not included).

Packing info

Modes Of Packing	Inner Box Size	Carton Size
6PK	305*187*310mm	394*320*325mm(6*2Sets)

Garden/Courtyard/Pathway/Firepalce/Planter

