

# MLWL Series

## LED Landscape Well Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:


The MLWL-SHLD series features a die-cast aluminum body with a frosted PC lens, designed for standard U.S. junction pipes. Available in black or ORB finishes, it is ideal for wet locations and offers easy installation. Operating efficiently on 12-24V AC/DC, it functions within a temperature range of -4°F to 104°F. Consuming only 6W of power, it boasts a CRI of over 90Ra and utilizes copper cable material, delivering 450-520 lumens with a 5CCT color temperature. The optical lens and shield design help minimize glare while focusing the light. Rated IP65, this fixture is perfect for low-voltage landscape lighting applications such as pathways, driveways, decks, and gardens.



MLWL-6W-30K-SHLD



### DIMENSION

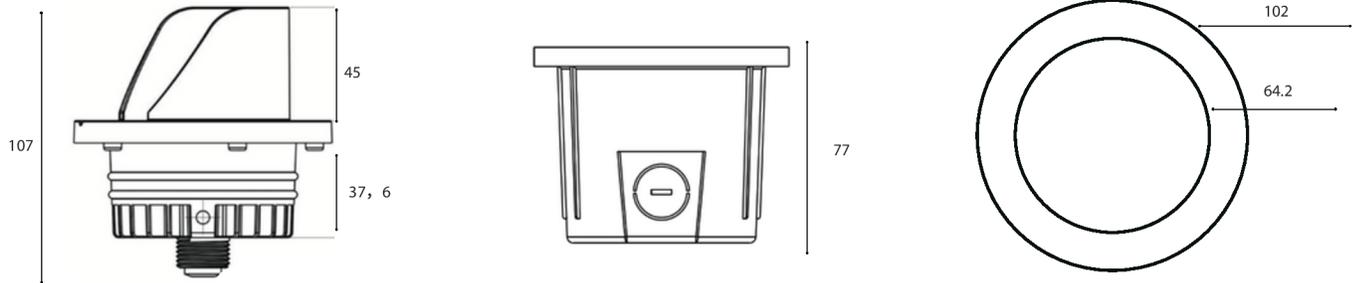

### TECHNICAL SUMMARY

MODEL NO.	TOP	WATTS	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
MLWL-6W-30K-FLAT	Open Flat Top	6W	520LM	27/30/35/40/50K	12-24V	N/A	N/A	ETL
MLWL-6W-30K-LVER	Louver Top	6W	520LM	27/30/35/40/50K	12-245V	N/A	N/A	ETL
MLWL-6W-30K-SHLD	Shielded Top	6W	520LM	27/30/35/40/50K	12-24V	N/A	N/A	ETL

### PART NUMBER ORDERING SUMMARY

## MLWL-6W-30K-SHLD



# MLWL Series



## LED Landscape Well Light

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### CONSTRUCTION

•Unit includes heavy duty metal frame, LED array, heat sink, hanger, security cable and high quality LED tube.

### MOUNTING

•

### WARRANTY

5 years manufacturer warranty, consult [www.mwledlighting.com](http://www.mwledlighting.com) for more details.

\* Terms and conditions may apply.

---

### HIGHLIGHT

#### Durable Construction

Made from die-cast aluminum, ensuring long-lasting durability and resistance to harsh outdoor conditon

#### Easy Installation

Designed for standard U.S. junction pipes, allowing for quick and hassle-free setup.