

CR-7088R/G Dual Color Combo Exit Light



FEATURES & BENEFITS

- Universal field-selectable single-/double-face
- 2 X 1.2 W fully adjustable lamp heads
- Suitable for Damp Locations
- UL 924 and CEC Title 20 Compliant

SPECIFICATIONS

Illumination: Legend: Long-life, high-intensity LEDs

Lamps: 24PCS SMD LED total 2.4W

Housing: Injection-molded thermoplastic ABS housing

UL-94-V0 flame-retardant, fire-resistant

Legend: Fully illuminated 6" characters

Input Voltage: 120/277VAC 60Hz

Input Rating: 2.0W, 150mA

Battery: Maintenance-free 3.6V NiCad battery

Operating Temperature: 0°C to 40°C (32°F to 104°F)

Charging time: 24 hours

Discharge time: 90 minutes

Mounting: Wall and ceiling


Finish: White

Dimension: 488.37*184.2*93.16mm

Certifications: UL 924 Listed for Damp Locations

Meets NFPA 101 Life Safety Code, NEC, OSHA

California Energy Commission (CEC) Title 20 Compliant

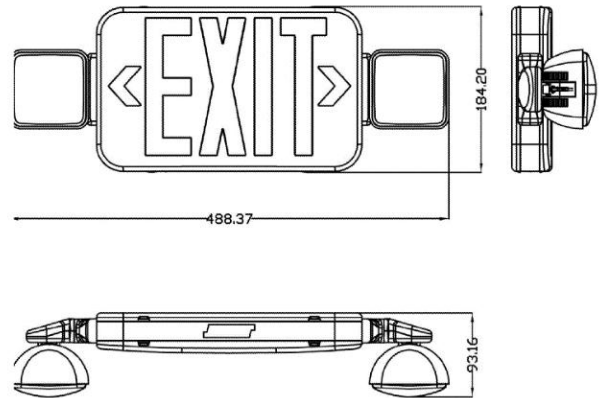

ORDER INFORMATION

Model	Voltage	Color of Letter	Emergency Duration	Remote	Self-Diagnostic	Certificate
CR-7088R	120/277V	Red	90 minutes	/	/	UL
CR-7088G	120/277V	Green	90 minutes	/	/	UL
CR-7088R-RC	120/277V	Red	90 minutes	3.6V 3W	/	UL
CR-7088G-RC	120/277V	Green	90 minutes	3.6V 3W	/	UL
CR-7088R-AT	120/277V	Red	90 minutes	/	Yes	UL
CR-7088G-AT	120/277V	Green	90 minutes	/	Yes	UL