

Top features

- Full-Body IP65 Certified.
- DLC Standard^[1], 135LPW.
- 3 Power & 3 CCT field-adjustable.
- Flicker free(≤ 10%).

Application Scenarios

- Food & Beverage Processing Plants
- Pharmaceutical & Cleanrooms
- Commercial Kitchens
- Indoor Parking Garages
- Automotive Shops

Specifications and accessories

UL Listing:

Suitable for wet locations.

LEDs:

Long-life, high-efficacy, micro-power LEDs

Lifespan:

Lumen Maintenance, L70 > 100,000 hours based on IES LM-80 results and TM-21 calculations

Lens:

Frosted Polystyrene

Finish:

Long lasting white with high durability

Ambient Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Driver:

Driver includes dimming control wiring for 0-10V dimming systems.

IESNA LM-79 & IESNA LM-80 Testing:



Ever-tie LED luminaires have been tested based on IESNA LM-79 and LM-80 by a third-party laboratory

Mounting:

Recessed ceiling mount ready(default)
Suspension mount with optional accessories

Optional accessories(purchased separately):

- Drywall mount kit
- Cable suspending mounting kit

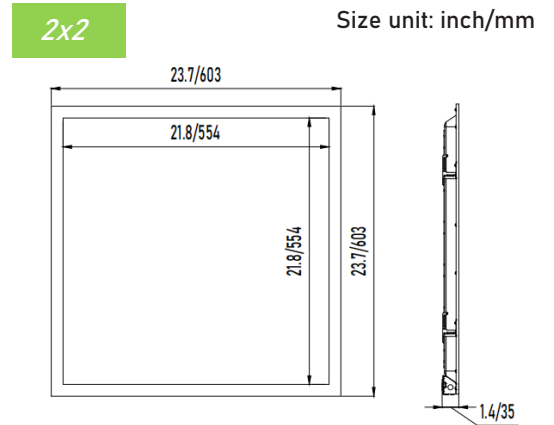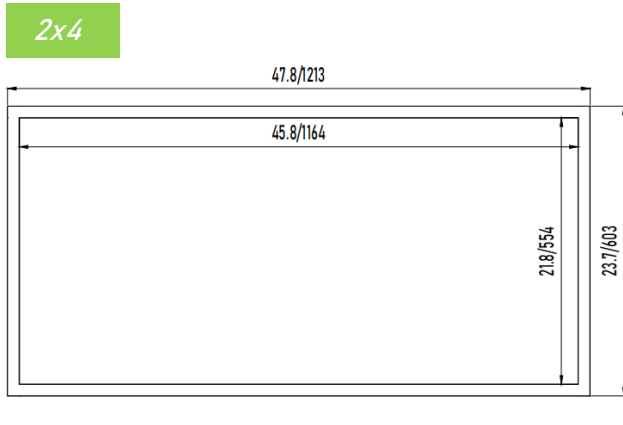

Optional accessories



Selectable table

Catalog No.	Size	Input Wattage (W)	Lumens Rated (lm)	LPW (lm/W)	DLC	CCT
ETLPZG3-IP-22/5/DC/30/22/14/YDM/83550/A3/B7	2x2	30/22/14	4,000/3,000/2,000	135	6.0S	Selectable, 35K,40K,50K,
ETLPZG3-IP-24/5/DD/44/36/28/YDM/83550/A3/B7	2x4	44/36/28	6,000/5,000/4,000	135	6.0S	

Ordering Information

ORDERING EXAMPLE:

ETLPZG3-IP-22/DC/30/22/14/YDM/83550/A3/B7

Product Code	Size	Module type	Power	Dimming	CCT	Other Items/Options
ETLPZG3-IP	22	DC	30/22/14	YDM	83550	A3/B7
IP65 Panel light	24 22	(Defined by ET)	Switchable Power	YDM 0-10V dimming	83550 80 CRI, 3500K, 4000K, 5000K switchable	A3 B7 Driver code LED code

[1] DLC 6.0S since without Controls Ready.

Note: Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.